



brands you trust.



Industrial Diaphragm Valves

CRANE[®]

ChemPharma Flow Solutions

www.cranechempharma.com

A Continuing Story of Success

No matter where in the world you use valves, dedicated sales associates and distribution partners are close by.

A continuing tradition of innovation.

P. K. Saunders invented the original diaphragm valve in 1928. Today, Saunders continues to develop innovative designs using the latest materials technology.

Millions in service.

Saunders diaphragm valves are recognized worldwide for versatility and reliability. They are used in every process industry. When millions of Saunders diaphragm valves installed in process plants around the world.

Dependable operation.

Engineers know they can trust Saunders Valves. They set the industry standard for dependable, consistent operation, even in the most adverse conditions with years of trouble-free performance.

Customer Service.

Customers know they can depend on Saunders for after sales service and technical support from one of our many locally based sales associates and distribution partners.

The Science Inside.

Saunders proudly develops and manufacturers its polymer compounds, with more than 75 years of polymer technology, it is "The Science Inside™" our valves which sets us apart.

	Page		Page
Saunders –			
A Continuing Story of Success .	2		
Saunders Full Range of Diaphragm Valves.	3		
A Wide Range Of Applications.	4		
Valve Type Comparisons	5		
Saunders A Type (Weir) Diaphragm Valves			
Valve Features	6		
Benefits for Corrosive & Abrasive Applications	7		
Materials of Construction			
Valve Bodies	8		
Body Linings	9		
Standards, Dimensions & Weights	10-11		
Flow Coefficients Cv and Kv	12-13		
Large Valve Sizes 16", 18", and 20"			
DN400, DN450 and DN500	14		
Manual Bonnet Options	15		
Saunders Diaphragms			
Diaphragm - Materials of Construction	16-17		
Diaphragm - Traceability & Validation	18-19		
Diaphragm Material Ratings	20		
Diaphragm Temperature & Pressure Relationships	21		
Saunders WFB Type Valves			
Marine and Fire Fighting Applications	22-23		
Saunders KB (Straight-Through) & K Type (High Flow) Diaphragm Valves			
Features and Benefits	24-25		
Materials of Construction	26		
Temperature & Pressure Relationships	27		
KB Manual Bonnet Options	28		
KB Flow Coefficients	29		
KB Flow Coefficients Continued & Quality Assurance.	30		
KB Dimensions & Weights	31		
K Flow Coefficients.	32		
K Dimensions & Weights	33		
Pneumatic Valve Actuation			
EC & SSC Actuators	34		
ECX Actuators	35		
EC Materials of Construction ..	36		
SSC Materials of Construction ..	37		
ECX Materials of Construction ..	38		
EC, SSC & ECX Actuator Dimensions	39		
ES Actuators	40		
ES Materials of Construction ..	41		
ES Actuator Dimensions	42		
Valve Throttling and Control ..	43		
Actuator Accessories & Options	44-45		
Ordering Information	46-47		



A Type screwed

Weir type valve in ductile iron, bronze gunmetal and stainless steel.

1/4" to 3"
DN8 to DN80



WFB

A specialized range of weir type diaphragm valves for marine and firefighting applications. Provides a high level of reliability in adverse conditions.

1 1/2" to 2 1/2"
DN40 and DN65



Weld End Valves

Weir type weld or clamp end diaphragm valve in stainless steel for biopharm and chemical applications.

1/4" to 6"
DN8 to DN150



KB Type (Straight-Through)
Screwed End

Straight through bore screwed valve in cast iron, bronze and stainless steel.

1/2" to 2"
DN15 to DN50



KB Type (Straight-Through)*
Flanged End

Diaphragm valve with a full bore opening to ensure maximum flow when handling viscous or abrasive fluids. Also available with various diaphragm and lining options.

3/4" to 14"
DN20 to DN350

*K type also available in USA

Saunders Diaphragm Valve

A Wide Range fo Applications

Listed below are four categories of typical applications for Saunders Diaphragm Valves.

ABRASIVE	CORROSIVE	INDUSTRIAL	ASEPTIC
Fertilizer Titanium dioxide Phosphate Copper Mining Gold Mining Coal Slurry Sand FGD Cement Ceramics Sewage Sugar	Chlor-Alkali Iron and Steel Sulphuric Acid Effluent Treatment Potable Water Pulp & Paper Basic Chemicals Acids and Alkalies Organics Toxic Fluids Nitric Acid	Marine Vegetable Oil Paints Fire Fighting Tanning Oil Production Automobile Air Effluent Gases, Fuels Dye Liquors	Biotechnology Pharmaceuticals WFI Fine Chemicals Chromatography Cosmetics Ultra Filtration Clean Water CIP Yeast Food & Beverage Soap

◆ Minerals processing, chemicals, fertilizers, china clay, paper, and power generation are but a few of the industries that rely on Saunders KB Type diaphragm valves to withstand a wide variety of abrasive service conditions.

◆ Ores — phosphate rock or bauxite in aggregate form, slurries such as gypsum in power plant desulphurization, powders — titanium dioxide in pigment application are typical service examples.

◆ Applications requiring a combination of corrosion and abrasion resistance, such as phosphate rock/sulphuric acid, together with reliability and long service life are ideal applications for Saunders KB Valves.

◆ Corrosion is estimated to cost worldwide industry more than 300 billion dollars every year, touching every process industry sector .

◆ Saunders personnel offer expertise and unrivaled experience in corrosive applications.

◆ Innovative materials technology has resulted in the current extensive range of valve options including elastomer and fluoropolymer linings, designed especially to combat corrosion.

◆ Saunders valves are widely used on utility (air, water, and gas) service lines, as well as effluent treatment systems.

◆ In the Food Industry Saunders valves are widely used in margarine, yogurt and corn processing plants.

◆ Saunders are widely used in the marine applications and in the automobile sector on service lines, paint coating systems and on road and rail tankers.

◆ Saunders pioneered high purity valve technology.

◆ The top ten pharmaceutical companies in the world head our international customer base.

◆ Saunders extensive range of valves designed for the pharmaceutical industry are detailed in other literature.




Compare various valve types against
industrial process requirements

	Valve/Service Features	Diaphragm	Ball	Butterfly	Globe	Gate	Lubricated Plug
Superior	Ability of leak tight shut-off against gases, liquids and solids	Green	Orange	Orange	Red	Grey	Red
Poor	Resistance to abrasion and erosion	Green	Red	Orange	Grey	Red	Orange
	Wide choice of materials to match service	Green	Blue	Green	Orange	Red	Blue
	Non-turbulent flow path	Green	Green	Blue	Grey	Green	Green
	Low fluid friction loss	Green	Green	Green	Orange	Green	Green
	Weight/size ratio	Orange	Orange	Green	Red	Grey	Red
	Resistance to corrosion	Green	Green	Green	Grey	Red	Orange
	Compact overall height	Orange	Green	Green	Orange	Grey	Green
	Pressure range	Red	Green	Green	Blue	Green	Green
	Vacuum capability	Green	Blue	Orange	Grey	Grey	Red
	Maintenance - in-line servicing, low cost spares	Green	Orange	Orange	Orange	Red	Grey
	High purity	Green	Orange	Grey	Grey	Grey	Grey
	Control applications	Blue	Orange	Green	Green	Blue	Blue
	On/off applications	Blue	Green	Orange	Orange	Grey	Red
	Temperature range	Orange	Green	Blue	Green	Green	Blue

Saunders offers a comprehensive range of diaphragm valves.

They encompass the full spectrum of corrosive and abrasive applications that require reliable leak free valve operation.


Easily maintained to ensure many years of trouble free operation, the Saunders valve has become a standard used in industries such as chemical production, mining, water treatment, fertilizer production, marine and many more.

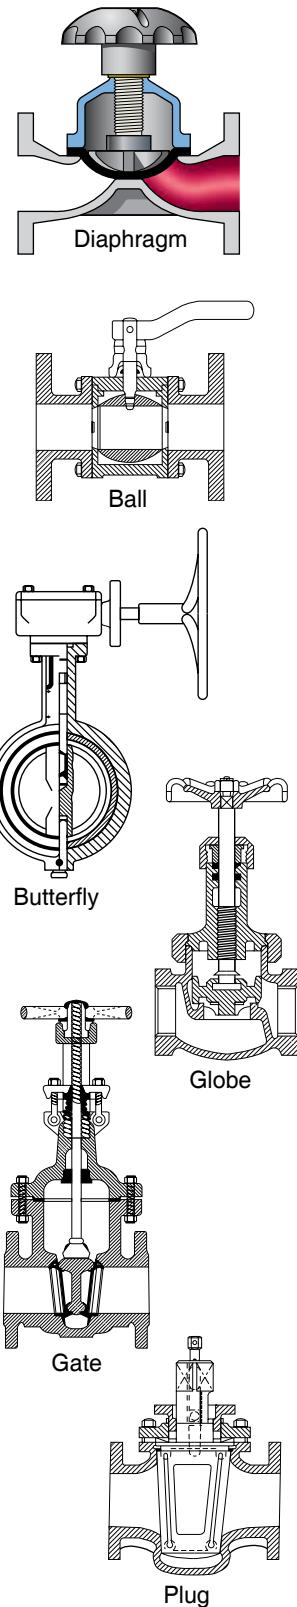


Saunders A Type Diaphragm Valves

Valves for Corrosive and Abrasive Applications

The Original and the Best
Saunders diaphragm valve
features and benefits for corrosive
and abrasive applications with
100% leaktight closure operation

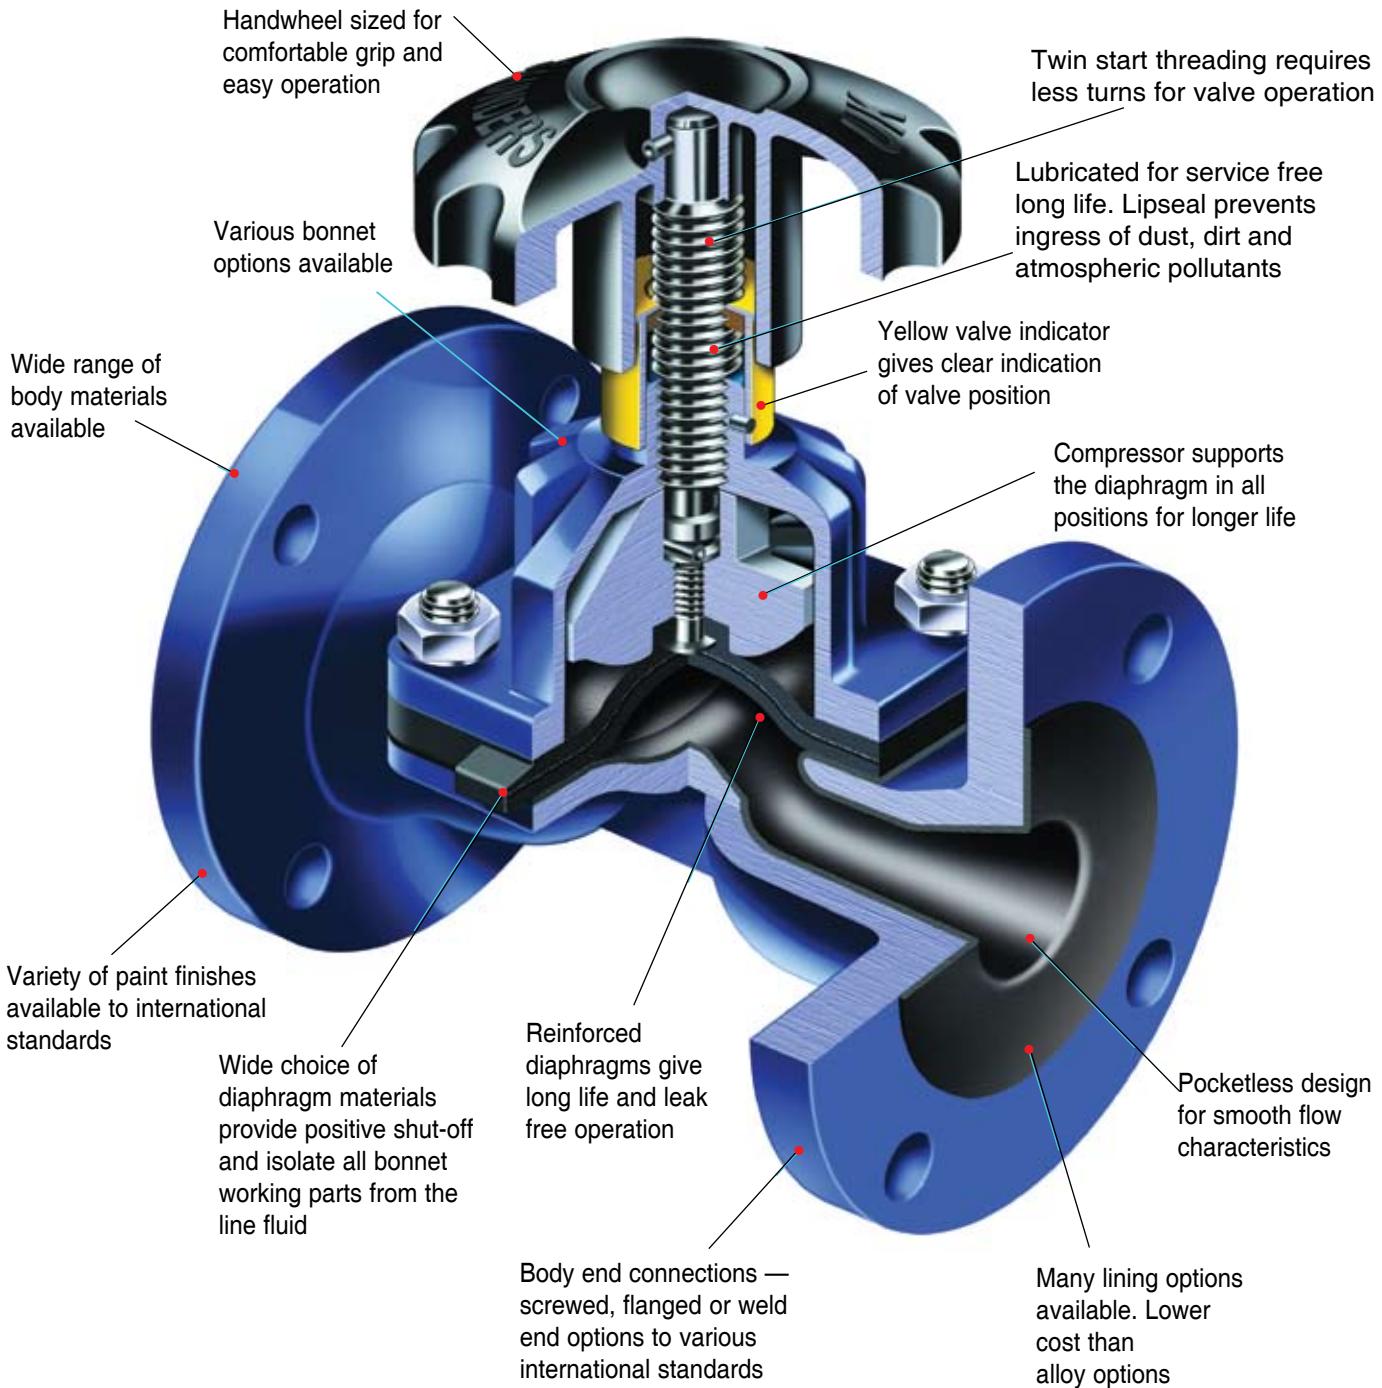


Our Saunders A Type diaphragm valves have been developed to handle a wide range of fluids and gases. Choose from a broad range of materials, methods of operation, and body end connections to satisfy the needs of your most corrosive and abrasive applications.

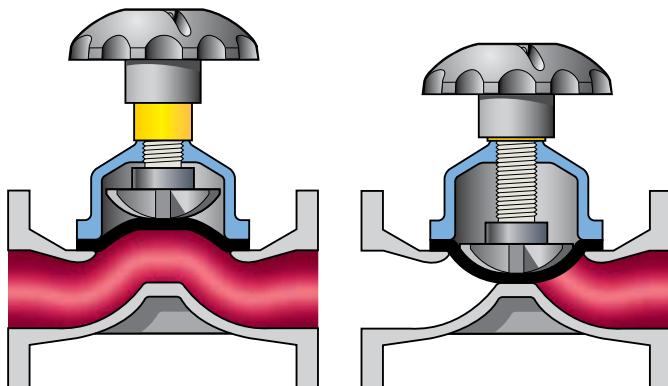

Valve flow

Pocketless design for contamination free performance and smooth flow characteristics. Linear operation ensures valve does not induce damaging pressure surges or static charges.

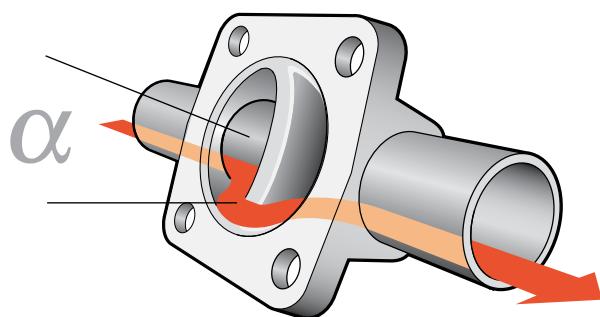


Valve set for self draining

The Saunders valve can be installed to assist self-draining if required. Please consult us for drainage angle advice.

Valve usable in any position

The Saunders valve can be installed in any position without affecting its operation. We recommend installing at least a 6x pipe diameter from bend or pump.

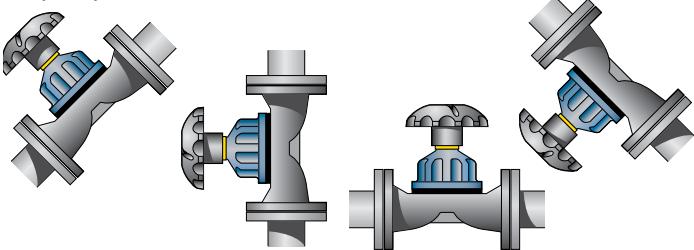


Ease of maintenance

Three part design allows maintenance and actuator retrofitting without removing the valve, resulting in lower long-term cost of ownership compared to other valve types.

- Extended life, reliability, safety and ease of use, combined with an essentially simple design, results in low maintenance and cost-effective operation.
- On pressure and vacuum, Saunders diaphragm valves operate and close 100% leaktight even after thousands of operations, reducing processing and handling costs, by eliminating emissions normally associated with conventional valve designs.
- All working parts of the valves are isolated from the line media and positive closure is obtained even on frequent cycling or with entrained particulates in the line unlike other valve types.
- Throttling and control characteristics are enhanced by a streamlined flow path that is cavity free and provides excellent flow control capabilities.

Saunders A Type Diaphragm Valves

Industry Standards

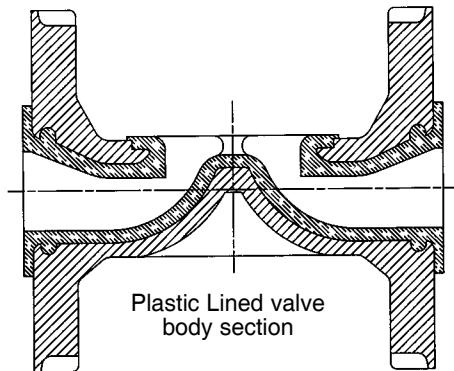

Plastic lined body features


- ◆ Ductile iron body – high mechanical strength
- ◆ Ductile iron body – mechanically supports plastic lining
- ◆ Lining protected from ultraviolet (UV)
- ◆ Injection gate to side of weir flange means:-
 - Smooth weir for diaphragm sealing and zero leakage
 - Lining lock-on weir flange and in-bore inlet
 - Lining thickness range 0.12" – 0.20" 3–5 mm
¾" to 6" DN20–DN150

Rubber lined body data

- ◆ Soft rubber linings
- ◆ Natural rubber (polyisoprene) 40–46° IRHD
- ◆ Butyl (Isobutylene isoprene), 60–66° IRHD
- ◆ Hard ebonite rubber HRL, 75–85° Shore D
- ◆ Lining thickness range 0.08" – 0.18" 2–4.5mm
¾" to 14" DN20–DN350

Valve body lining – production tests

- All Saunders lined valves have each body individually tested for lining integrity.
- ◆ Glass lining – Spark test 10kV ac
- ◆ Rubber, Butyl – Spark test 14kV ac/dc
- ◆ Rubber, HRL – Spark test 17kV ac/dc
- ◆ Plastic lined – Spark test 20kV ac/dc

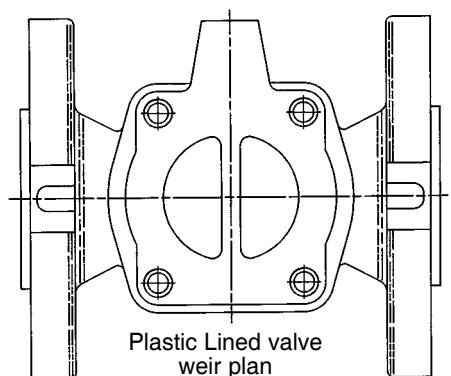

Standard Body Materials

CAST IRON	Flanged . . . ½" to 16" DN15–DN400 ASTM A48 Class 35C or ASTM A126 Class B
DUCTILE IRON SG IRON	Screwed . . . ½" to 2" DN15–DN50 ASTM A395: 65-45-12 Flanged . . . ½" to 6" DN15–DN150 ASTM A395: 60-40-18 or ASTM A395
CAST STEEL	Flanged . . . ½" to 4" DN15–DN100 ASTM A216 WCB
BRONZE GUNMETAL	Screwed . . . ½" to 3" DN15–DN80 ASTM B62 or ASTM B584 Alloy 836 Flanged . . . ½" to 4" DN15–DN100 None
STAINLESS STEEL	Screwed . . . ½" to 3" DN15–DN80 Flanged . . . ½" to 6" DN15–DN150 ASTM A743: CF-8M or ASTM A351: CF-8M



New Environmental Protection

Saunders environmental protective coating has been developed specifically to provide unrivalled corrosion resistance. This protective coating utilizes Du Pont's Tefzel™ (Ethylenetetraflouoroethylene) material.

The green Tefzel™ coating is applied before the injection moulding of the Perfluoroalkoxy (PFA) or Ethylenetetraflouoroethylene (ETFE) lining, using an electrostatic powder coating method. By coating the valve body, bonnet and hand wheel, both internal and external corrosive protection is maximized providing peace of mind in extreme corrosive material processing applications.

Available in $\frac{3}{4}$ " to 4" DN20 to DN100 with a PFA lining and $\frac{3}{4}$ " to 6" DN20 to DN150 in the ETFE lined option.



Valve Body Linings for Saunders Valves

- **Perfluoroalkoxy – PFA**

Most suitable for concentrated mineral acids at high temperature, aromatic, aliphatic and chlorinated solvents.

- **Polytetrafluoroethylene – PTFE**

Most suitable for concentrated mineral acids at high temperature, aromatic, aliphatic and chlorinated solvents.

- **Ethylene tetrafluoroethylene – ETFE**

Suitable for strong acids, salts in water at higher temperatures, solvents at medium temperature.

- **Polypropylene – PP**

Main applications include mineral acids, water, salts in water, and effluent treatment chemicals.

- **Glass**

Used in multi-process chemical plants on acids and solvents.

- **Hard Rubber – NR/HRL**

Used for salts in water, dilute mineral acids, chlorine water, de-ionized water, plating solutions and potable water.

- **Soft Butyl Rubber – IIR/BL**

Good for corrosive and abrasive slurries, mineral acids and acidic slurries.


- **Neoprene – CR**

Particularly suitable for animal, vegetable, fatty oils and greases. Abrasion resistance over wide pH range –used for aggressive slurries.

- **Soft Natural Rubber - AA/SRL**



High abrasion resistance. Suitable for use on powders, abrasive slurries, clays, coal dust, dry fertilizer, gypsum.

Valve Body Lining Materials – Visual Process Resistance Guide

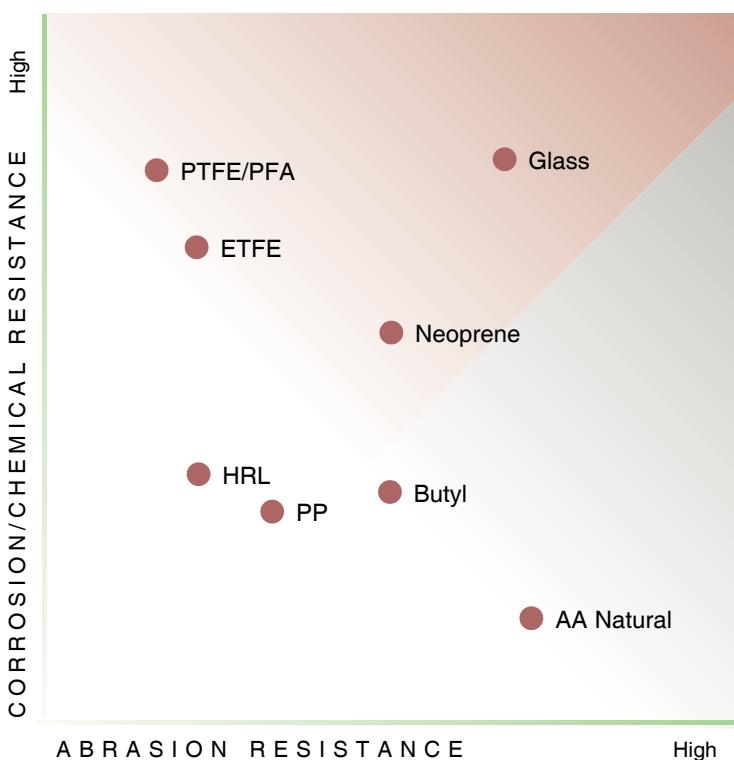

Saunders A Type Diaphragm Valves

Standards, Dimensions & Weights

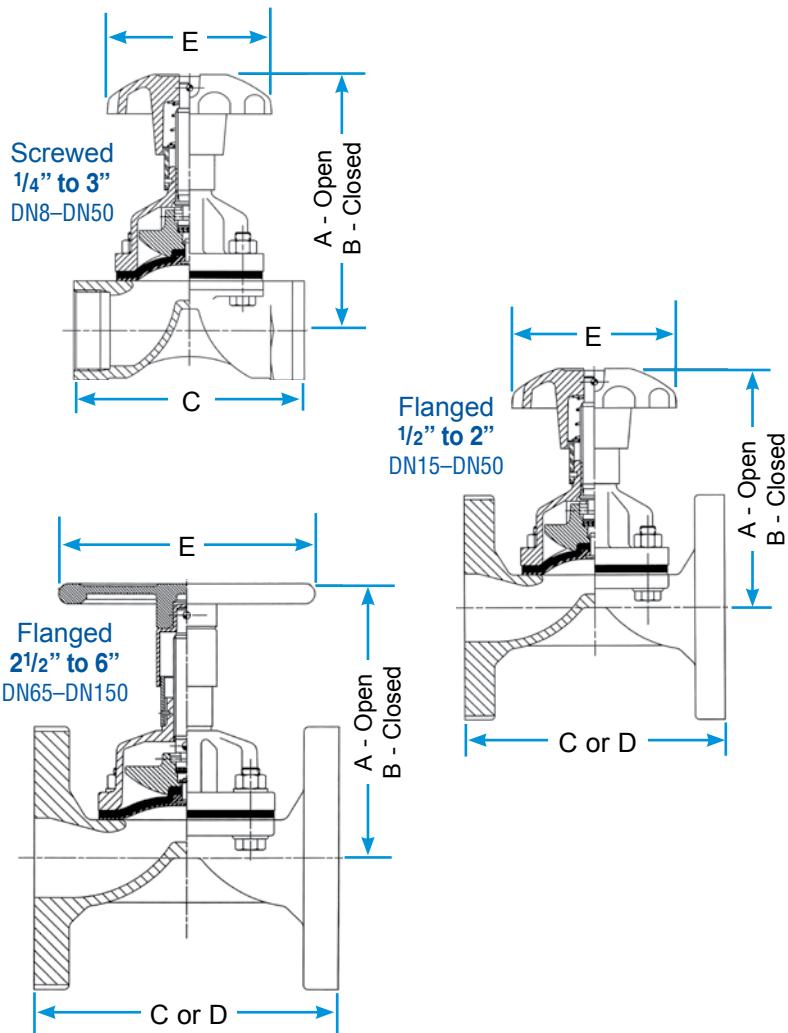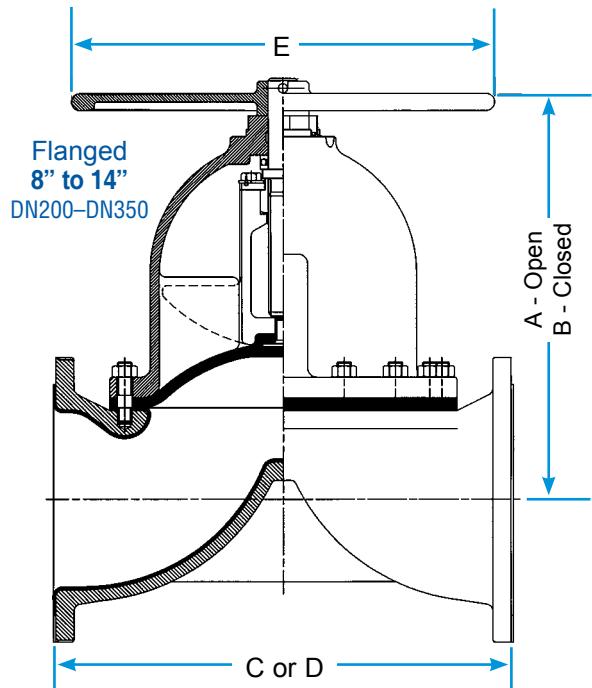

Saunders Valves are manufactured to the following industry standards (where applicable)

Diaphragm Valves (Design & Manufacture Standard Practice)	MSS SP-88
Flanged Valves	ASME B 16.5
Steel Valves	ASME B16.34
Cast Iron Flanged Fittings	ASME/ANSI B16.1
Bronze Gunmetal Flanges	ASME B16.24
Bronze Gunmetal Threaded Fittings	ASME/ANSI B16.15
Socketweld Fittings	ASME B16.11
Buttweld Ends	ASME B16.25
Cast Iron Threaded Fittings	ASME B16.4
Female Screwed Pipe Connections	AP15B
Pipe Threads	ANSI/ASME B1.20.1
Power Piping	ASME B31.1
Petro/Chem Piping	ASME B31.3

As well as being in overall lengths to EN 558-1 Series 1 and Series 7 and MSS SP88, Saunders valves are manufactured to the following standards:

Flanges	
BRITISH	BS 10 tables D and E BS 4504 tables PN10/16 BS 1560 Class 150
EUROPEAN	EN 1092-1 PN10/16 EN 1092-2 PN10/16
JAPANESE	JIS B 2212
Female screwed pipe connections	
BRITISH	BS 21 taper BS 21 parallel
GERMAN	DIN 259
INTERNATIONAL	ISO 7/1 taper ISO 7/1 parallel

Saunders A Type Diaphragm Valves

Large Sizes

Saunders large diaphragm valves have proven themselves in minerals processing and water treatment applications involving corrosive and abrasive slurries.

Double weir options are also available utilizing diaphragms and bonnets proven in 12" and 14" valves.


Valve sizes

16" DN400 is fitted with two 12" DN300 bonnets

18" DN450 is fitted with two 12" DN300 bonnets

20" DN500 is fitted with two 14" DN350 bonnets


These valves are not suitable for use with Group 1 (Dangerous) Gases.

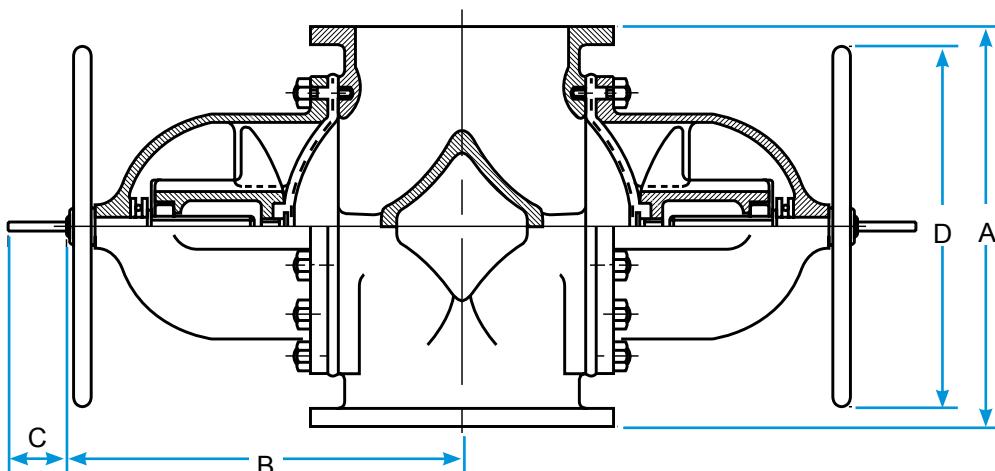


Valve Diameter

Inches DN	16 400	18 450	20 500	Inches mm
A	30	30	30	
	750	750	750	
B	30	30	31	
	750	750	780	
C	7.5	7.5	9.1	
	190	190	230	
D	28	28	28	
	700	700	700	


Manual Bonnet Options for A Type Valves

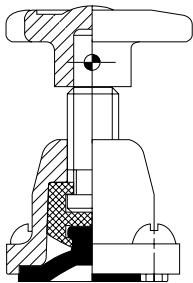


Rising
Handwheel
Valve sizes:
1/4" to 3/8"
DN8 to DN10

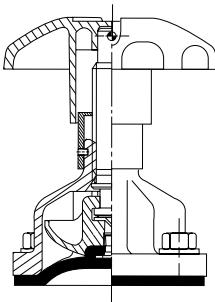


Cast Iron Rising
Handwheel
Bonnet
Valve sizes:
1/2" to 2"
DN15 to DN50

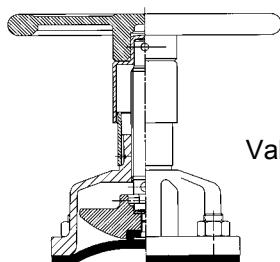


Cast Iron Rising
Handwheel
Valve sizes: **2 1/2" to 6"**
DN65 to DN150

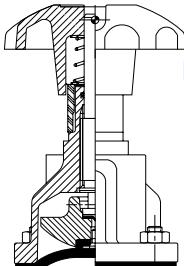


Fluoroelastomer
Sealed Bonnet
Valve sizes:
1/2" to 6"*
DN15 to DN150*

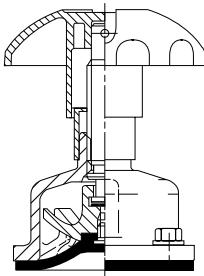


Stainless Steel
Valve sizes:
1/2" to 6"*
DN15 to DN150*

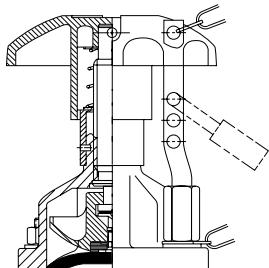


Rising Handwheel
Indicator
(simple padlocking)
Valve sizes:
1/2" to 6"*
DN15 to DN150*

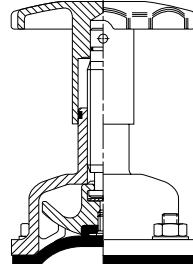


Stainless Steel
(Silicone Sealed)
Valve sizes: **1/4" to 3"***
DN8 to DN80

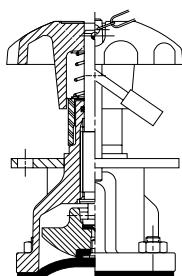


Fluoroelastomer
Sealed Padlocking
Valve sizes:
1/2" to 6"*
DN15 to DN150*

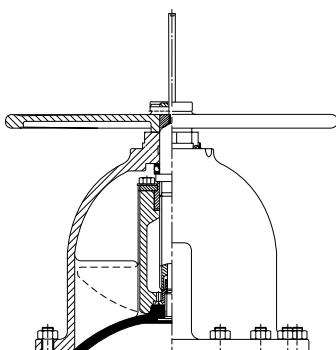

Non-rising Handwheel
with Indicator
Valve sizes: **8" to 12"**
DN200 to DN300

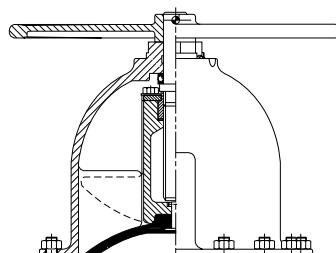


Non-rising Handwheel
without Indication
Valve sizes: **8" to 14"**
DN200 to DN350

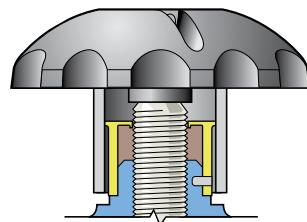


Lubrication

Bonnet assembly lubricated for long life. Needs no additional grease. The indicator lip seal stops the ingress of dust, dirt and atmospheric contaminants.

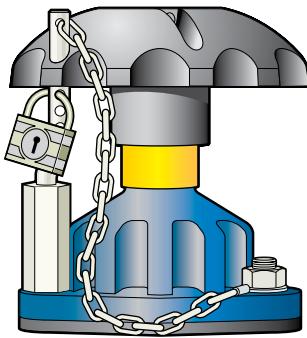

Padlock bonnet

Restricted valve operation can be achieved by utilizing the padlocking bonnet option.

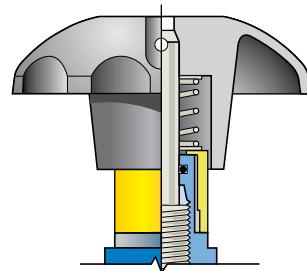

Sealed bonnet

In cases where hazardous liquids or gases are being handled and where additional safety features are considered to be necessary.

* Handwheel is spoked design 2 1/2" - 6" DN65 – DN150

Other bonnets are available upon request.

Saunders Diaphragms -The Science Inside

Saunders applies rigorous quality control measures at every step in the manufacture of its diaphragms.

Years of experience and materials development have resulted in a range of diaphragms providing exceptional performance in a wide variety of

applications.

You can rely on Saunders for stringent quality control and continuous product development.



Key Considerations

- ◆ High flex performance
- ◆ Compression set properties
- ◆ Chemical resistance
- ◆ Abrasion resistance
- ◆ Anti-aging
- ◆ Approvals, traceability

All rubber diaphragms incorporate the following features

- ◆ Constructed with multi-layers of rubber and nylon reinforcement
- ◆ Studs are attached with bonding adhesive and mechanical anchorage
- ◆ Rib on face for weir flange and across weir for leak tight sealing and lower closure torque
- ◆ Compressor support in both the open and closed positions for extended life



PTFE diaphragm bayonet fixing

PTFE Diaphragms

A two piece construction PTFE face with a reinforced rubber backing diaphragm to increase pressure rating and durability.

These diaphragms have a bayonet fitting to ensure reliable installation, reduce point loading and ensure maximum life.

(The 214K is three piece specially reinforced for chlorine service.)



Rubber diaphragm screw fixing

Rubber Diaphragms

The polymer material is bonded with a high strength woven reinforcement to ensure maximum strength and durability.

ISO Code	Catalog Code	Grade	Elastomer type	General service and approvals
NBR	C1	C	Butadiene Acrylonitrile, sulphur cured, black reinforced	Lubricating oil, cutting oils, paraffin, animal and vegetable oils, aviation kerosene
NBR	CV	CV	Butadiene Acrylonitrile, sulphur cured, black reinforced	Vacuum where oils are present, compressed air, liquid petroleum gas (LPG)
CR	HT	HT	Polychloroprene, sulphur cured, black reinforced	Abrasive slurries containing hydrocarbons
NR	Q1	Q	Natural rubber polyisoprene/SBR, sulphur cured, black reinforced	Salts in water, dilute acids and alkalis, abrasives
FKM	V1	226	Fluoroelastomer, amine cured, black reinforced	Concentrated acids, aromatic solvents, chlorine, ozone, chlorinated solvents, unleaded gasoline
CSM	U1	237	Chlorosulphonated polyethylene metal oxide cured, black reinforced	Strong acids, sodium hypochlorite, chlorine gas
	U2	286	Chlorosulphonated polyethylene metal oxide cured, black reinforced Kevlar fabric reinforced	Fire mains isolation in WFB valve
IIR	D1	300	Isobutylene Isoprene, resin cured, black reinforced	Salts in water, dilute acids and alkalis, drinking water, Food & Drug Administration (FDA), United States Pharmacopeia (USP), Water Regulations Advisory Scheme (WRAS)
EPM	E2	425	Ethylene propylene (EPM) organic peroxide cured, black reinforced	Salts in water, acids and alkalis, ozone, intermittent steam, drinking water, FDA, USP, WRAS
EPM	EV	425V	Ethylene propylene (EPM) organic peroxide cured, black reinforced	Vacuum where acid, alkali, water vapors are present, FDA, USP, WRAS
	P3	214/226	Virgin PTFE/Fluoroelastomer – two piece	Strong acids, solvents, chlorine, bromine at higher temperatures
	P1	214/300	Virgin PTFE/Isobutylene isoprene – two piece	Strong acids, alkalis and salts in water at high temperature. Constant steam, water for injection (WFI), biopharmaceuticals, FDA USP, WRAS
	P2	214/425	Virgin PTFE/Ethylene propylene (EPM) – two piece	Strong acids, alkalis and salts in water at high temperature. Constant steam, water for injection (WFI), biopharmaceuticals, FDA, USP, WRAS
S5	214S/425		Virgin PTFE(TFM)/Ethylene propylene (EPM) – two piece	Strong acids, alkalis and salts in water at high temperature. Constant and intermittent steam, WFI, biopharmaceuticals, FDA, USP, WRAS
	P7	214K/425	Virgin PTFE/PVDF/Ethylene propylene (EPM) – three piece	Chlorine, bromine gas and chlorinated solvents

**Standard**



- ◆ Rubber diaphragms have a brass stud
- ◆ Diaphragms suitable for vacuum duties (eg. CV) have steel stud. (Additional reinforcement above 3 inches.)
- ◆ PTFE diaphragms are fitted with stainless steel bayonet

Saunders Diaphragms are provided with:


- ◆ Full traceability of manufacture
- ◆ Coding tag for both material and batch number for easy identification
- ◆ Saunders name to confirm genuine manufacture and maximum reliability

Saunders Diaphragms -The Science Inside

Diaphragm Traceability and Validation

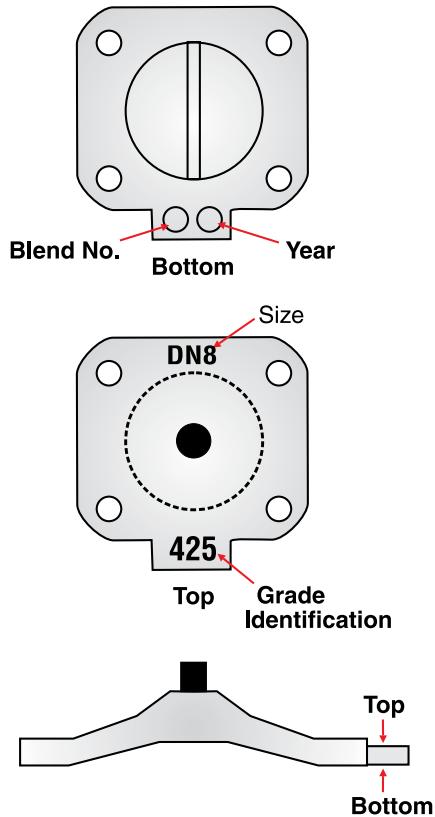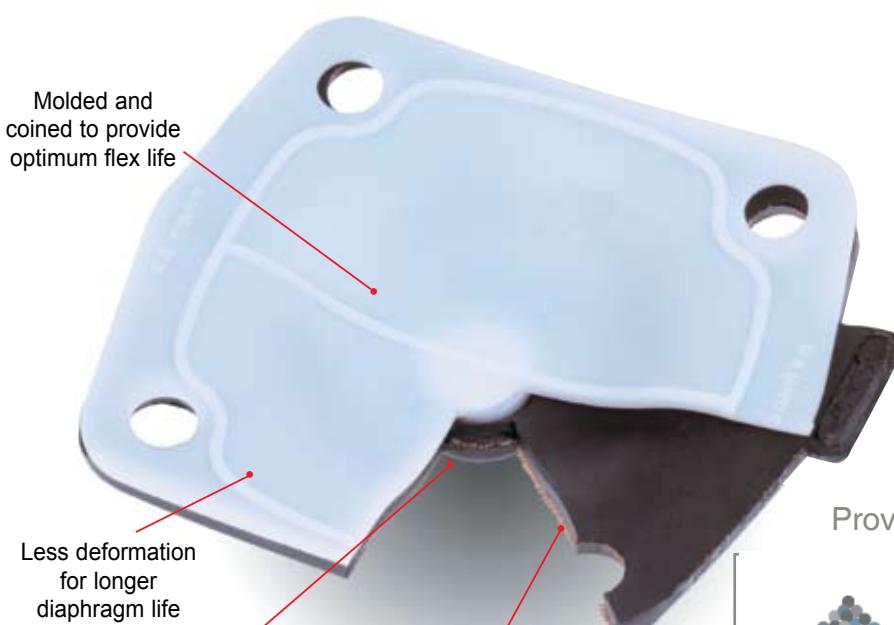


Proven manufacturing process

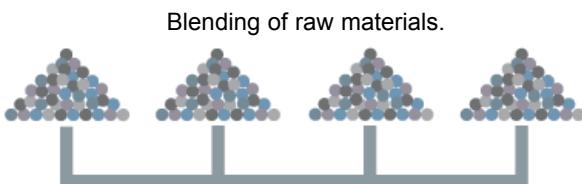

RUBBER BLEND
Individual make-ups are mixed together to form a blend and identified by a numeric system 01 and upwards.

Blend is calendered into liners, (continuous rolling of rubber sheets).

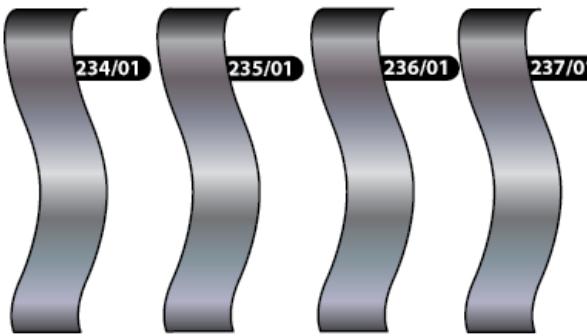

Liner is cut to length for construction of diaphragm



Fully Traceable diaphragms



Saunders Diaphragms -The Science Inside

Diaphragm Traceability and Validation

Validation support –
from raw materials to your system

- ◆ Diaphragms are batch traceable and carry a unique molded batch identification number
- ◆ Diaphragms can be issued with a certificate of FDA conformity to assist in FDA validation and internal quality controls
- ◆ Physical property data is also available upon request

Saunders diaphragms offer enhanced performance with more confidence

- ◆ The integrity of the product and the quality of your process is assured. All extractables are fully identified and guaranteed to meet FDA limits. Access to all physical data is available upon written request.

Expert and independent verification


- ◆ Saunders has worked with the Rubber and Plastics Research Association (RAPRA) to provide complete and detailed identification of extractables and leachables – leading the way and reaffirming our commitment to our customers and the industry.

Full traceability and product validation

Saunders is acknowledged throughout the industry as a leader in quality assurance techniques and design criteria for biopharm processes.

Saunders fully traceable diaphragms provide valve users with uniquely valuable support in the validation process.

- ◆ A unique molded reference number gives precise batch traceability
- ◆ Access is available to all relevant physical data
- ◆ Diaphragms meet the most stringent validation requirements
- ◆ A certificate of the physical properties of each batch is issued to ensure consistency and support validation on request
- ◆ A profile of the complete physical data of each batch is available to help troubleshooting
- ◆ Complete documentation package is available for all valve components in contact with the process fluids (EN 10204 3.1b certification).

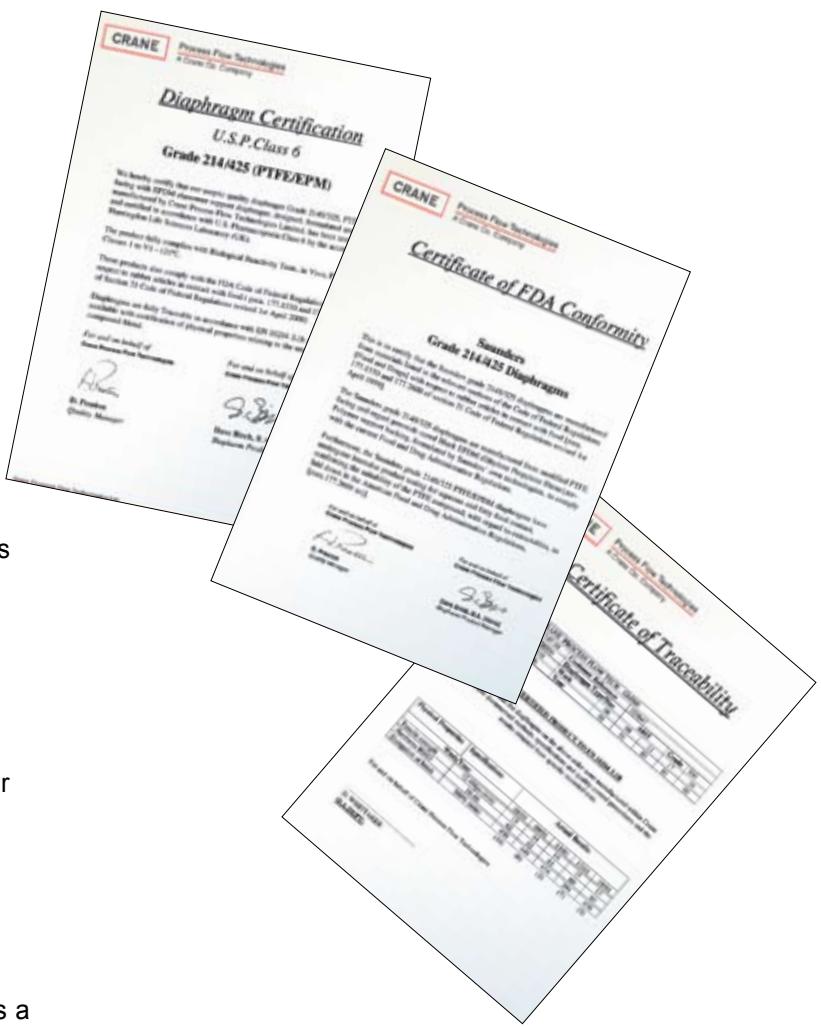



Validation support

Diaphragms conform to section 177.1550 (Perfluorocarbon resins) or 177.2600 (Rubber Articles) in Chapter 1 Title 21 of the FDA Regulations (revised 1st April 2001) USP Class V and VI. Traceable to EN10204 3.1b (was DIN 50049 3.1b)

Saunders Diaphragms -The Science Inside

Diaphragm Materials

Diaphragm Materials – Visual Process Resistance Guide

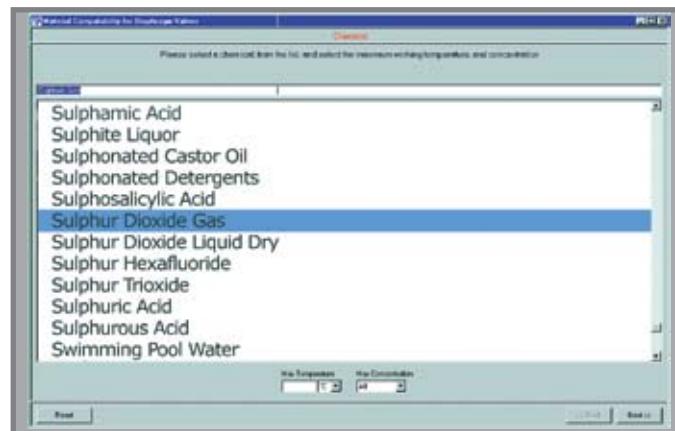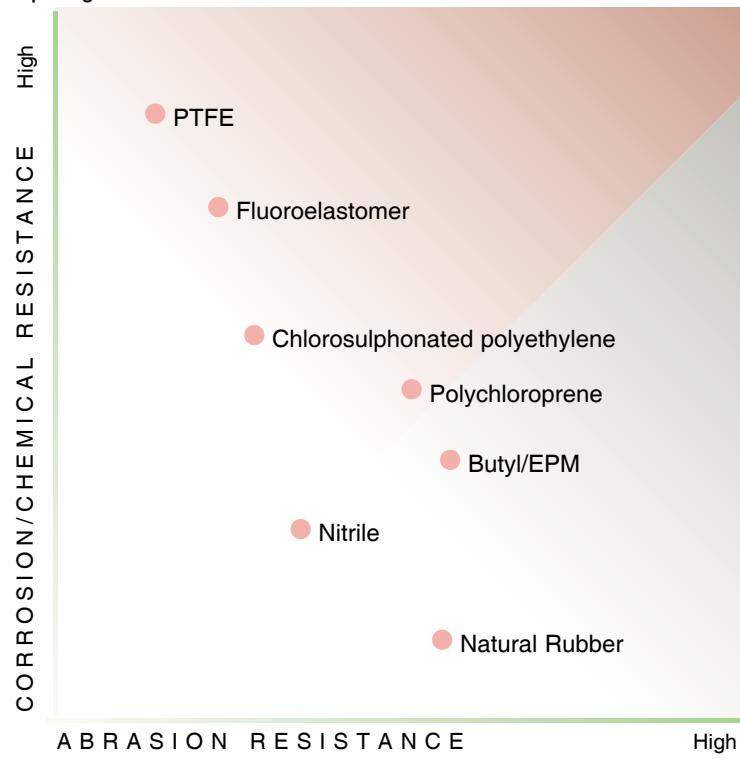

The Saunders Material Selection Database software is available which lists over 1,000 process chemicals. Just enter the temperature and concentration and a recommendation for the body and diaphragm material is selected.

Material	Catalog Code	Grade
PTFE	P7	214/214K
Fluoroelastomer	V1	226
Chlorosulphonated Polyethylene	U1	237
Polychloroprene	HT	HT
Nitrile	C1, CV	C, CV
Butyl	D1	300, 300V
EPM	E2, EV	425, 425V
Natural Rubber	Q1	Q

Maximum working pressure (psi / bar) – A Type valves

As with all valves, the application and environment have a major bearing on actual valve operating limits, but the following can be used as a guide to the maximum operational limits.

Bonnet assemblies with rubber diaphragm																			
Valve Size	Inches DN	1/4 8	3/8 10	1/2 15	3/4 20	1 25	1 1/4 32	1 1/2 40	2 50	2 1/2 65	3 80	4 100	5 125	6 150	8 200	10 250	12 300	14 350	
Non-rising handwheel																90	75	60	52.5
																6	5	4	3.5
Rising handwheel				240						150									psi
				16						10									Bar
WFB and tank cleaning						225		225											psi
						15		15											Bar

Bonnet assemblies with PTFE faced diaphragm																		
Valve Size	Inches DN	1/4 8	3/8 10	1/2 15	3/4 20	1 25	1 1/4 32	1 1/2 40	2 50	2 1/2 65	3 80	4 100	5 125	6 150	8 200	12 300		
Non-rising handwheel																90	75	psi
																6	5	Bar
Rising handwheel				150							105							psi
				10							7							Bar


Temperature and Pressure Relationships

Diaphragm Temperature Type A (F °C)					
32F	0°C				
23.5°	P3 214/226		347	175°	
-4-20°	P2 214/425		320	160°	
-4-20°	P7 214/PVDF/425	212	100°		
-4-20°	P1 214/300		302	150°	
-58-50°	Q1 Q	212	100°		
-4-20°	C1 C & CV	212	100°		
-22-30°	HT	212	100°		
23.5°	V1 226		302	150°	
14-10°	U1 237 & U2 286	212	100°		
-40-40°	D1 300 & 300V		266	130°	
-40-40°	E2 425 & EV 425V		266	130°	


Temperature bands for diaphragms are shown as a guide only. Service conditions will determine the highest working temperature. For example, EP diaphragms have given excellent performance under certain conditions up to 302F 150°C.

In certain applications the following temperature ratings apply:
DI: -4F,-20°C. SS: -22F,-30°C. GM: -22F,-30°C.

A Type Valve Body (Ductile Iron & Cast Iron) Temperature/Pressure Relationship

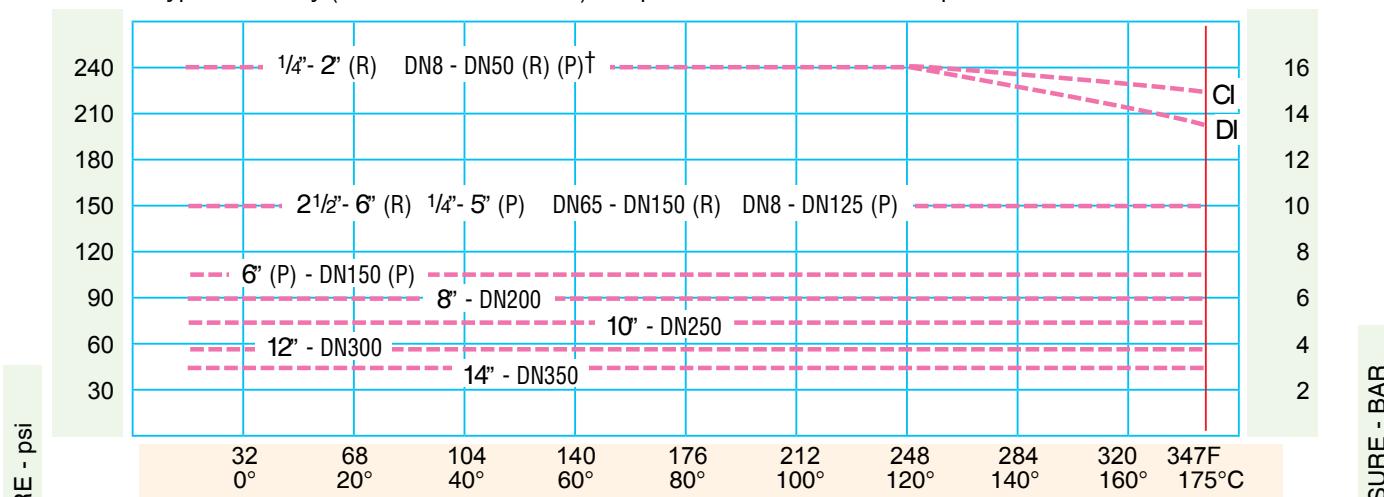

A Type Valve Body (Carbon Steel, St.Steel & Copper Alloys) Temperature/Pressure Relationship

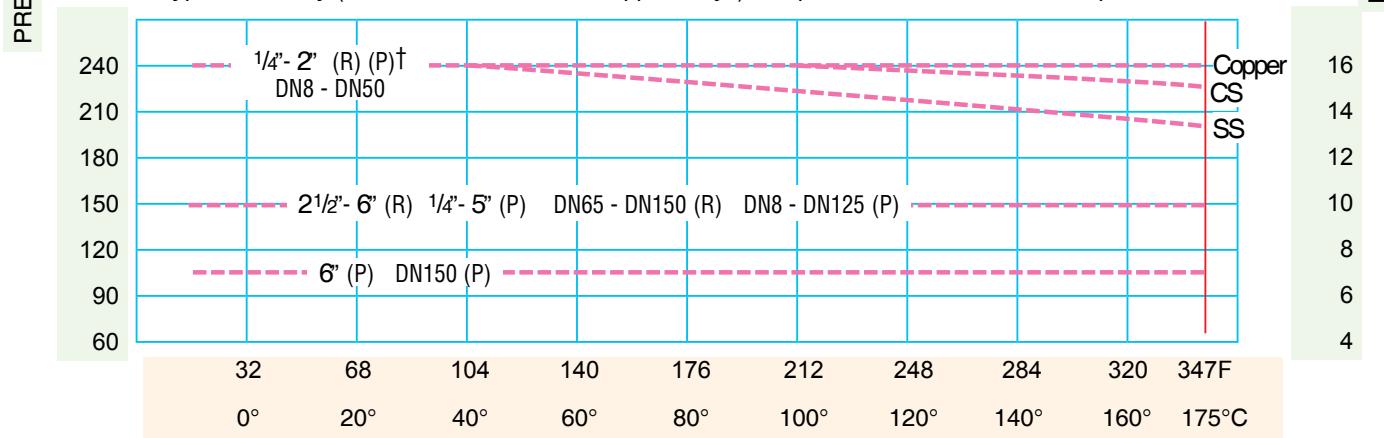

32F 0°C Body Temperature Limit (F °C)*

14-10°	HARD RUBBER LINED	185 85°
14-10°	POLYPROPYLENE LINED (P.P.)	185 85° **
14-10°	BUTYL RUBBER LINED	230 110°
14-10°	ETHYLENE TETRAFLUOROETHYLENE (ETFE)	302 150°
14-10°	CAST IRON: UNLINED, GLASS LINED & PTFE LINED	347 175°
14-10°	DUCTILE IRON: UNLINED	347 175°
14-10°	DUCTILE IRON: PFA LINED	347 175°
-22-30°	OTHER METALS: CARBON STEEL, STAINLESS STEEL, COPPER ALLOYS	347 175°

* When lined body is cast steel, minimum temperature is -22F-30°C. When DI Grade EN-GJS-400-18-LT is used, minimum temperature is -4F-20°C.

** Depends on body substrate material.

† 214S Mdd closed version only.

Saunders WFB Type Valves

For Marine and Fire Fighting Applications

The WFB valve is a weir type diaphragm valve developed specifically for fire fighting, tank cleaning and wash-down on land or sea.

There are no second chances with fire hydrant valves.

Saunders WFB model provides dependable operation when it matters – even after years of non-use.

This highly specialized fire hydrant valve has been tested and approved by the world's leading safety agencies.

Similar in design and operation to the widely used A Type, it has the added benefit of a certified chlorosulphonated polyethylene base fire resistant diaphragm.

The WFB valve is available in ductile iron SG Iron or bronze Gunmetal providing high mechanical strength. This means that they provide greater resistance to accidental impact. Bronze Gunmetal resists corrosion on the more demanding saline applications.

Diaphragms

Fire mains use:

- ◆ 286 grade 'Fire' diaphragm
- ◆ 233 CV grade diaphragm (tank cleaning)

Flanges

- ◆ BS10 Tables D, E and F (Bronze & Ductile Iron Gunmetal & SG Iron)
- ◆ BS4504 PN16
- ◆ DIN 86021 ND16 and ANSI B16.24 Class 150 (Bronze Gunmetal)
- ◆ EN1092-2 PN16 and ANSI B16.1 Class 150 (Ductile Iron SG Iron)

Main Body Inlet/Outlet Body Options

Screwed	Flanged
BS 21RP	BS4504 PN16
BS 21RP	ANSI Class 150
BS 21RP	BS10 Table D
BS 21RP	JIS10K
	ANFT (American National Fire Thread) male or female

Other screwed and flanged options available on request.

Valve Weights lb / kg

Model	4	9	11
Bronze	22.7	22	22
	10.3	10	10
Ductile Iron	17.6	17.2	19.7
	8	7.8	8.95













Model 4 with body and bonnet material in Ductile Iron SG Iron



Model 11 with body and bonnet material in Bronze Gunmetal.



Model 4 with body and bonnet material in Bronze Gunmetal.

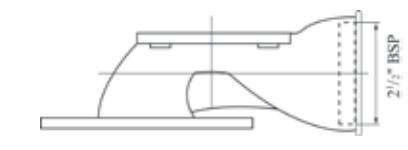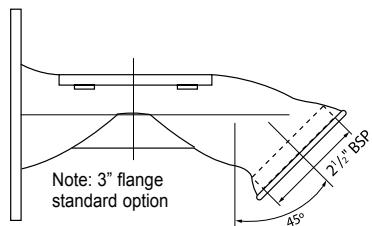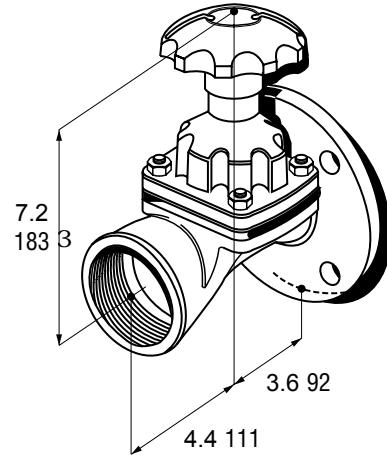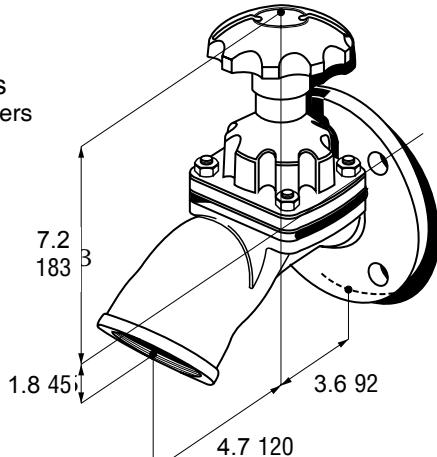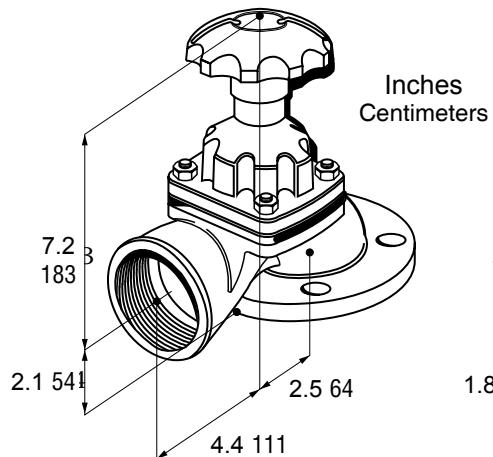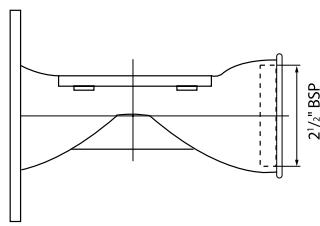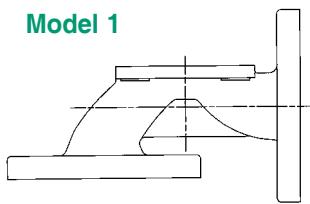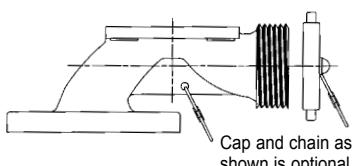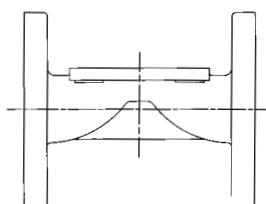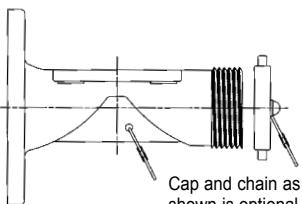Model 4**Model 11****Model 9****Model 1****Model 2****Model 6****Model 7**

SIZE	MODELS							BODY MATERIALS
	1	2	4	6	7	9	11	
1½ DN40	—	◆	◆	—	◆	◆	—	Bronze Gunmetal
2½ DN65	◆	◆	◆	◆	◆	◆	◆	Bronze & Ductile Iron Gunmetal & SG Iron

Testing: Valves tested in accordance with MSS SP-88 BS 6755 i.e. body strength test to 325 psi 22.5 bar, seat test to 240 psi 16.5 bar (1.1 x maximum working pressure)

"We specified Saunders WFB 2½" 65mm nominal bore fire-mains hydrant valves for our ferries and cruise liners. Significant factors behind this choice are excellent reliability and the low maintenance costs".
P&O Cruises (UK) Ltd

Product approvals



Marine Safety Agency
The Department of
Transport Certificate of
Inspection and Tests
Certificate No: SUR 222
(REV 4/94)
Model: 1½, 2½
DN40, DN65



Lloyd's Register of
Shipping
LR Type Approval
Certificate
Certificate No:
97/00047
Model: 1½, 2½
DN40, DN65



Bureau Veritas
Type Approval
Certificate
Certificate No: 2207
3457 C10 H
Model: 1½, 2½
DN40, DN65



Registro Italiano
Naval
RINA
Type Approval
Certificate No:
MAC/057/94
Model: 2½
DN65

- UK Marine Safety Agency
- Bureau Veritas
- Rina
- Lloyds
- DTI

The whole valve has successfully undergone a high temperature resistance test, BS 5041 Part 1, audited by a Lloyds Surveyor.


Note: All Saunders Diaphragm Valves carry DNV, LR, AUB, and BV approvals.

Saunders K/KB Type Design Features

Contribute to low pressure drop high flow capability and long valve life for abrasive applications.

The Original and the Best


Saunders diaphragm valve features and benefits for corrosive and abrasive applications with 100% leaktight closure operation

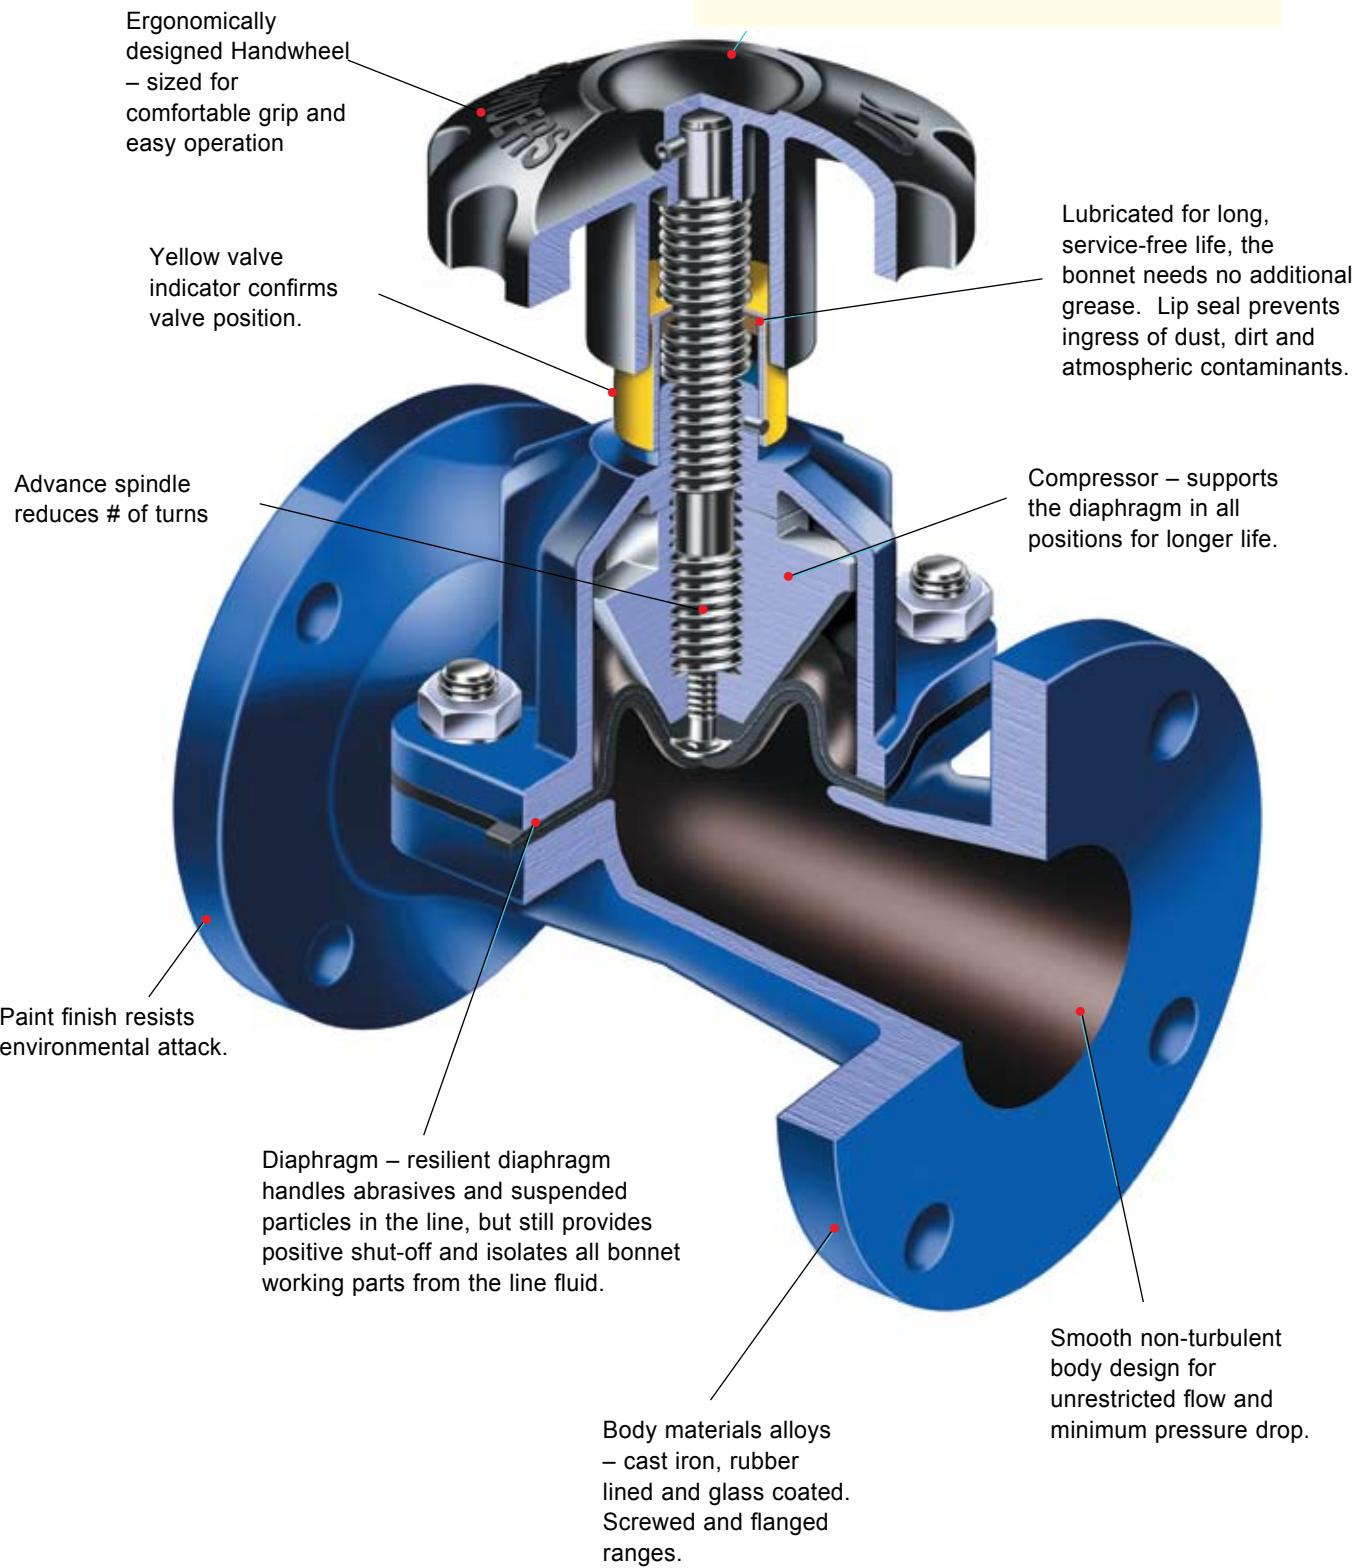

Saunders K/KB Type Diaphragm Valves

K: High Flow / KB: Straight Through

Saunders full bore K/KB type diaphragm valves, with their smooth non-turbulent body design have proved to be outstanding in corrosive and abrasive applications. The full bore concept is designed for minimum flow resistance while allowing rodding out and easy cleaning.

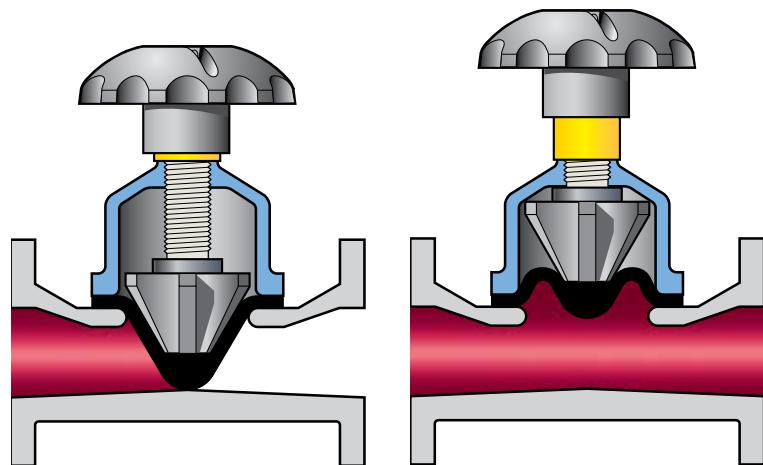

Features	Benefits
Straight through body, high flow	No obstruction, low pressure drop
Flexible closure even with solids present	Leaktight by design
Only two wetted parts	Better resistance to corrosion/abrasion and longer life
Specially developed linings and diaphragms available	Minimal maintenance

• Low pressure drop

Low pressure drop and high flow makes this valve ideal for handling slurries.

• Cavity free

No cavities ensures solids do not build up in the line causing wear and blockage.

• Valve flow


Smooth bore straight through body gives high flow performance with minimum turbulence, while giving 100% leaktight closure.

• Lubrication

Bonnet assembly lubricated for long life. Needs no further grease. The indicator lip seal stops the ingress of dust, dirt and atmospheric contaminants.


• Ease of maintenance

Three part design allows maintenance and actuator retrofitting without removing the valve body from the pipeline. Extended life, reliability and safety, combined with essentially simple design, result in low maintenance and low cost of ownership.

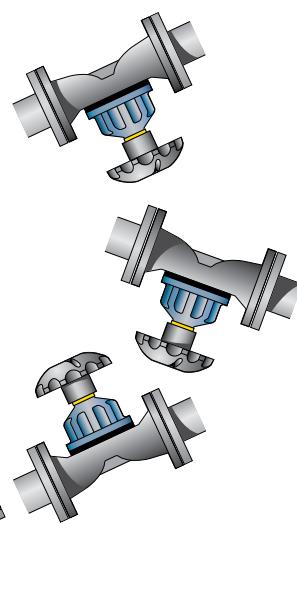

• Use in any position

The K/KB valves can be installed in any position without affecting its operation. We recommend six times pipe diameter from pump or bend.

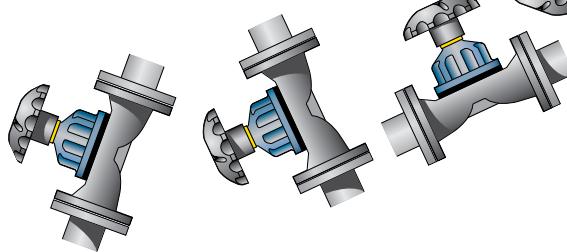

Saunders K/KB Type Diaphragm Valves

Materials of Construction

Valve bodies

- Cast Iron, Bronze - Screwed - 1/2" - 2"
- Cast Iron, Gunmetal - Screwed - DN15 - DN50
- Cast Iron, Bronze - Flanged - 1/2" - 14"*
- SG Iron, Cast Steel Stainless Steel
- Cast Iron, Gunmetal - Flanged - DN15 - DN350*

* Contact us for materials range

Diaphragm Materials

ISO Codes	Catalog Code	Grade	Elastomer Type	General Service & Approvals
NR	AA	AA	Natural rubber (polysisoprene) metal oxide pigmented – brown sulphur cured, black reinforced	Abrasives in slurry or dry powder form
NBR	C1	C	Butadiene Acrylonitrile, (Nitrile) sulphur cured, black reinforced	Lubricating oil, cutting oils, paraffin, animal and vegetable oils, aviation kerosene
CR	HT	HT	Polychloroprene, sulphur cured, black reinforced	Abrasives slurries containing hydrocarbons
CSM	U1	237	Chlorosulphonated polyethylene	Acids, hypochlorite
FKM	V1	226	Fluoroelastomer, amine cured, black reinforced	Concentrated acids, aromatic solvents, chlorinated solvents, unleaded gasoline
IIR	D1	300	Isobutylene Isoprene, resin cured black reinforced	Abrasive slurries, acid digested slurries, alkalis, dry powders
EPM	E2	425	Ethylene propylene (EPM) organic peroxide cured, black reinforced	Abrasive slurries, acid digested slurries, alkalis, dry powders


Rubber lined body data

- Soft rubber linings
 - Natural (Polyisoprene), 40–46° IRHD
 - Polychloroprene, 72–78° IRHD
 - Butyl (Isobutylene isoprene), 60–66° IRHD
- Hard ebonite rubber HRL, 75–85° Shore D
- Lining thickness range 0.7" - 0.17" for valve sizes 3/4" - 14" 2–4.5mm (DN20–DN350)

Valve body lining – production tests

- All Saunders lined valves have each body individually tested for lining integrity.
- Glass lining – Spark test 10kV ac
- Rubber, Butyl, Polychloroprene, Natural – Spark test 14kV ac/dc
- Rubber, HRL – Spark test 17kV ac/dc

Diaphragm Materials – Visual Process Resistance Guide

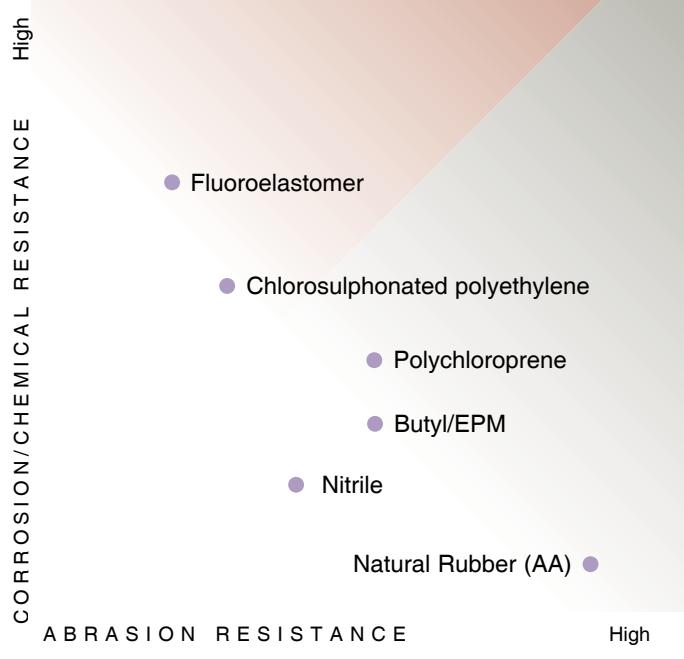




Type KB Valves – maximum working pressure - psi / bar

Valve Size Inches DN	1/2 15	3/4 20	1 25	1 1/4 32	1 1/2 40	2 50	2 1/2 65	3 80	4 100	5 125	6 150	8 200	10 250	12 300	14 350
Non-rising Handwheel												52.5	22.5	psi	
												3.5	1.5	bar	
Rising Handwheel				150				90						psi	
					10				6					bar	

Maximum working pressure for KB valves shown is for manual valves, defined as the maximum line pressure against which valves may be operated to closed position up to and including 131°F 55°C. For ES actuators, please refer to appropriate actuator performance selection technical data sheets.


Saunders K/KB Type Diaphragm Valve Performance

Temperature and Pressure Relationship

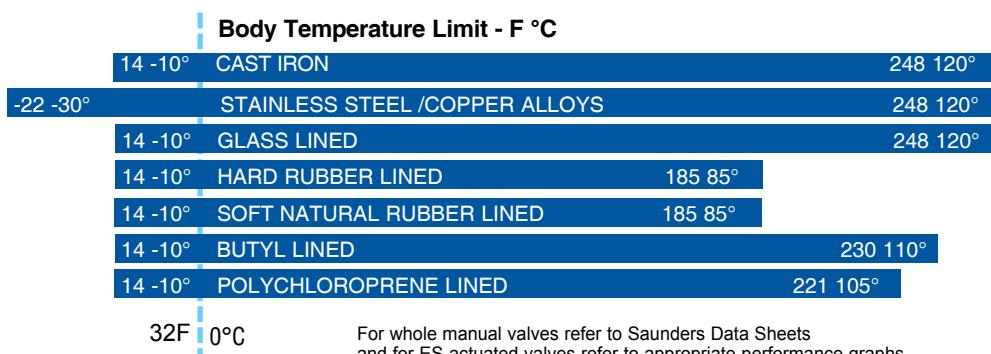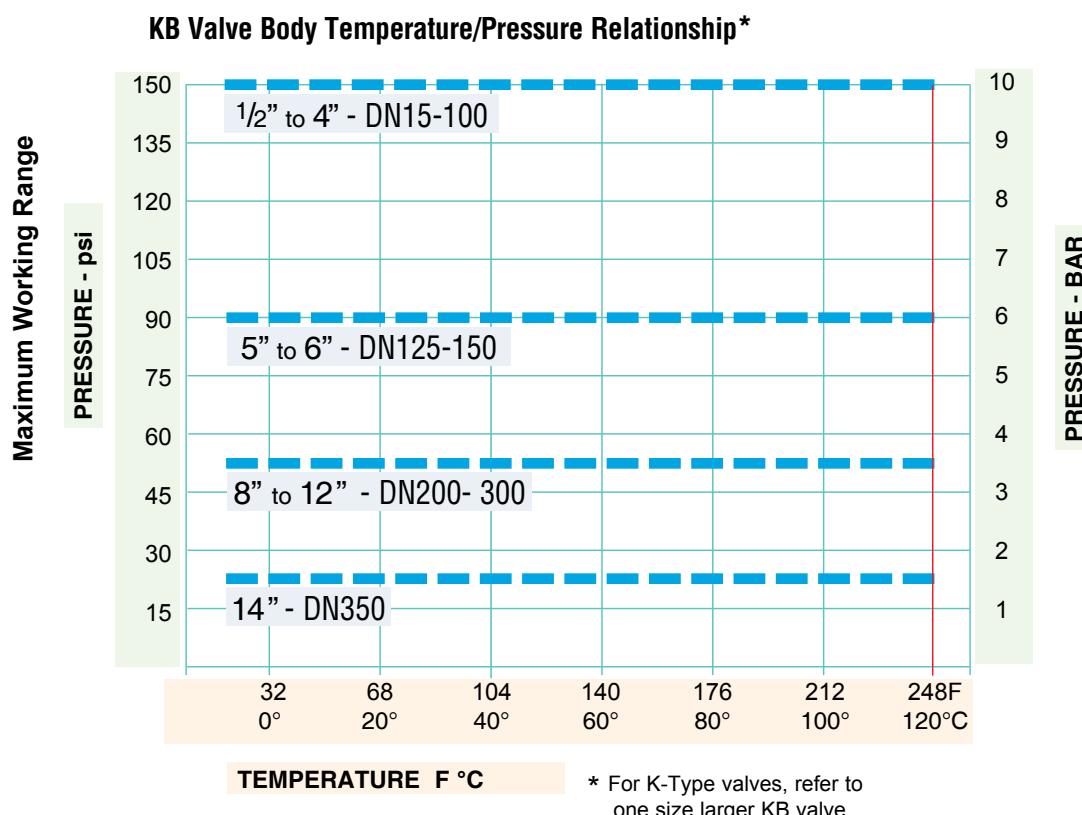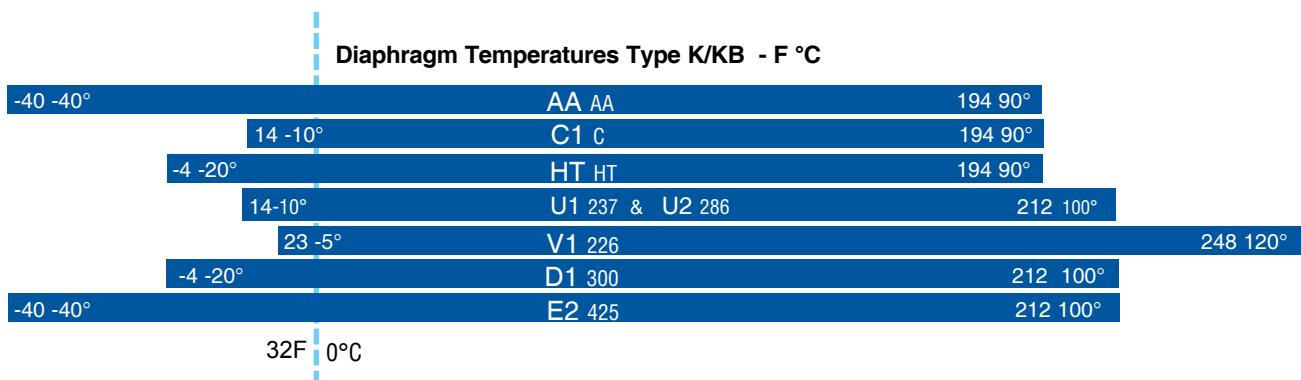


Saunders KB Type Diaphragm Valves


Typical Bonnet Options for Manual KB Valves

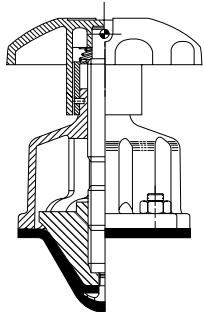


Rising Handwheel Indicator
Optional Metal Handwheel
Valve sizes:
1½" to 2"
DN15 to DN50

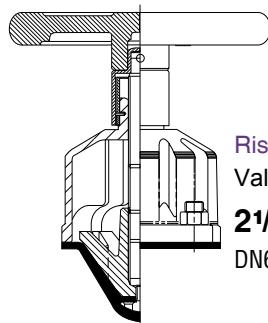


Rising Handwheel Indicator
Valve sizes:
2½" to 6"
DN65 to DN150

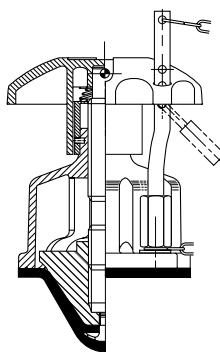


Rising Handwheel Indicator
(simple padlocking)
Valve sizes:
1½" to 2"
DN15 to DN50

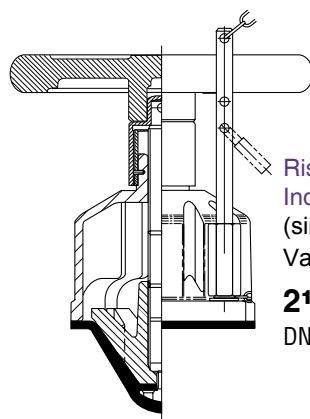


Rising Handwheel Indicator
(simple padlocking)
Valve sizes:
2½" to 6"
DN65 to DN150

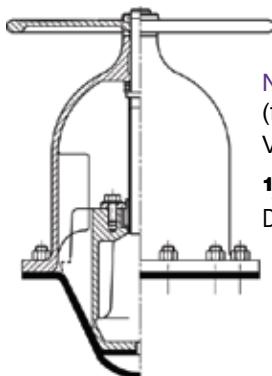

Non-Rising Handwheel
(fluoroelastomer sealed)
Valve sizes:
½" to 12"
DN15 to DN300

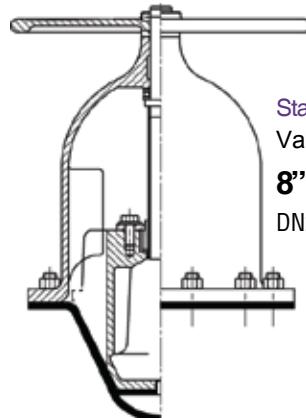


Standard Non-Rising Handwheel
Valve sizes:
8" to 14"
DN200 to DN350

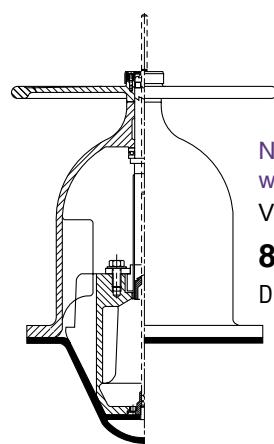

Non-Rising Handwheel
with Indicator
Valve sizes:
8" to 12"
DN200 to DN300

Saunders KB Type Diaphragm Valves

Valve Dimensions and Weights

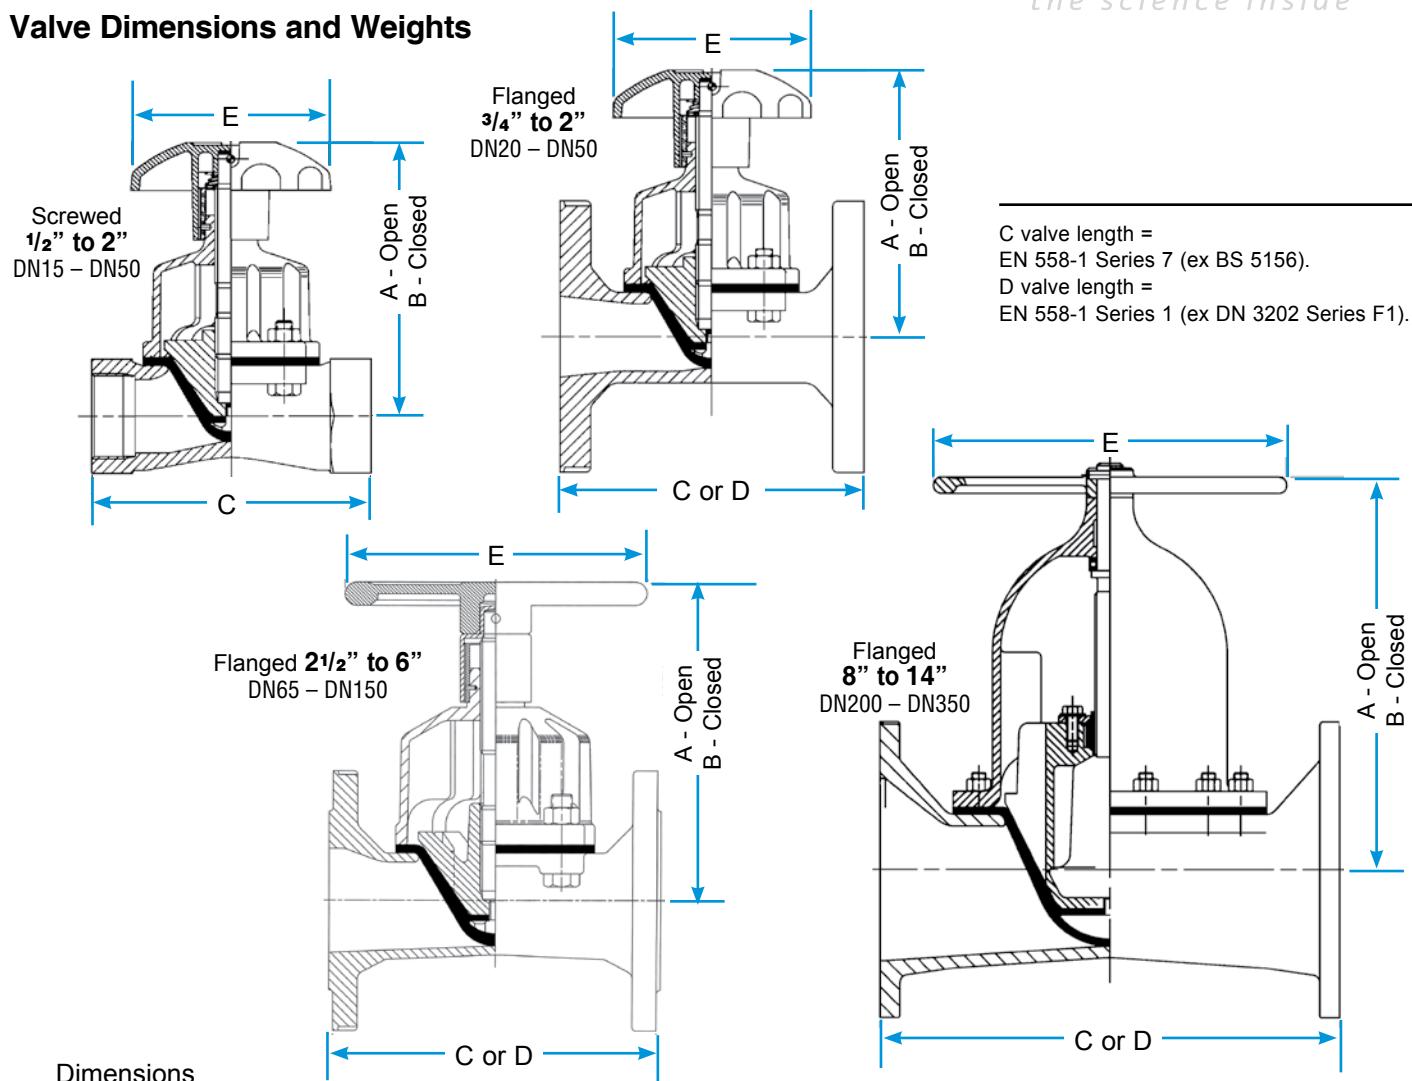

C valve length =
EN 558-1 Series 7 (ex BS 5156).

D valve length =
EN 558-1 Series 1 (ex DN 3202 Series F1).

Dimensions
in inches.


Weights
in
pounds.

Valve Size - Inches

	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	10	12	14
Screwed	A 4.2	-	6.5	-	6.5	7.2	-	-	-	-	-	-	-	-	-
	B 3.9	-	6.3	-	6.3	6.4	-	-	-	-	-	-	-	-	-
	C 2.5	-	4.4	-	5.6	6.6	-	-	-	-	-	-	-	-	-
	Weight	1.8	-	4.4	-	6.0	10.6	-	-	-	-	-	-	-	-
Flanged	A 4.1	4.1	6.5	6.5	6.5	6.9	9.2	10.6	12.3	13.2	17.1	16.0	21.9	24.7	26.2
	B 3.8	3.8	6.3	6.3	6.3	6.1	8.3	9.4	10.9	11.5	14.9	-	-	-	-
	C 4.3	4.6	5.0	5.8	6.3	7.5	8.5	10.0	12.0	14.0	16.0	20.5	25.0	29.5	38.6
	D 5.1	5.9	6.3	7.1	7.9	9.1	11.4	12.2	13.8	15.7	18.9	23.6	28.7	33.5	38.6
	Weight	4.5	5.1	9.1	9.6	12.0	22.5	24.7	39.5	69.2	101.9	148.4	240.3	429.9	648.2
Flanged Rubber Lined	A -	-	6.6	6.6	6.6	6.9	9.2	10.6	12.3	13.2	17.1	16.1	22.0	24.8	26.3
	B -	-	6.4	6.4	6.4	6.1	8.3	9.4	10.9	11.5	14.9	-	-	-	-
	C -	-	5.3	6	6.6	7.8	8.8	10.3	12.3	14.4	16.4	20.9	25.4	29.9	38.9
	D -	-	6.6	7.4	8.2	9.4	11.7	12.5	14.1	16	19.2	23.9	29	33.8	38.9
	Weight	-	-	9.3	12.5	16.4	23.2	25.6	48.3	75.8	101.9	163.8	280.0	449.7	648.2
Flanged Glass Lined	A -	4.2	6.5	6.5	6.5	7.0	9.3	10.7	12.4	13.2	17.2	16.0	22.0	24.8	26.2
	B -	3.9	6.3	6.3	6.3	6.2	8.3	9.4	10.9	11.6	15.0	-	-	-	-
	C -	4.7	5.1	5.8	6.4	7.6	8.6	10.1	12.1	14.1	16.1	20.6	25.1	29.6	38.7
	D -	6	6.4	7.2	8.0	9.2	11.5	12.3	13.9	15.8	19.0	23.7	28.8	33.6	38.7
	Weight	-	5.6	9.3	11.1	15.3	22.7	25.1	44.8	74.7	101.6	157.9	260.2	443.1	648.2
	E	3.5	3.5	4.7	4.7	4.7	6.7	9.1	11.0	11.0	14.5	14.5	19.0	23.0	27.5

All dimensions + or - 1/8 inch.

Saunders K Type Diaphragm Valves

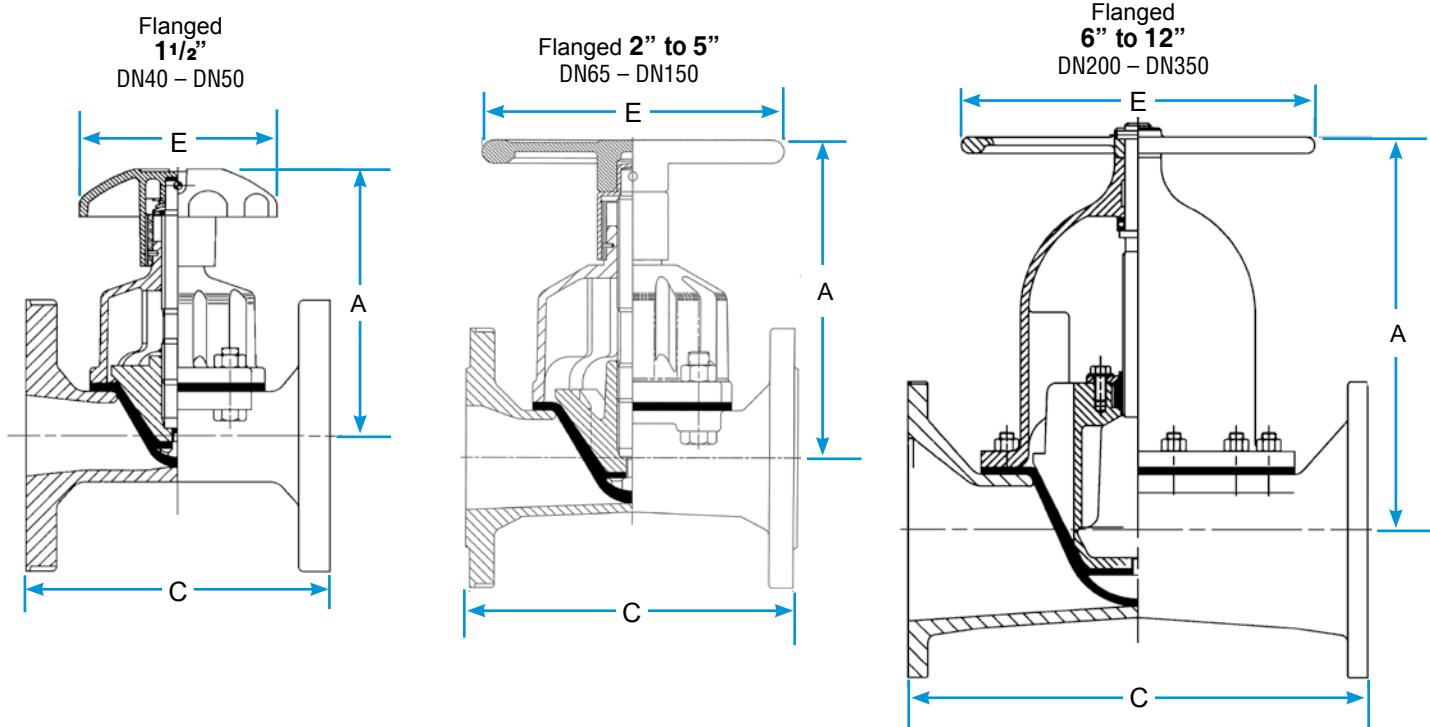

Dimensions
in inches.

Weights
in pounds.

Valve Size - Inches

	1 1/2	2	2 1/2	3	4	5	6	8	10	12	14
Flanged Unlined	A 6.38	7.75	9.13	10.38	11	14.50	16.50	22.38	25.13	26.63	26.13
	C 6.50	7.50	8.50	10	12.50	14	16	20.50	25	29.50	36.25
	Weight 13	19	33	49	65	142	158	300	460	670	1000
Flanged Rubber Lined	A 6.38	7.75	9.13	10.38	11	14.50	16.50	22.38	25.13	26.63	26.13
	C 6.75	7.75	8.75	10.25	12.75	14.25	16.38	20.88	25.38	29.88	36.63
	Weight 14	20	33	50	67	142	160	303	463	674	1004
Flanged Glass Lined	A 6.38	7.75	9.13	10.38	11	14.50	16.50	22.38	25.13	-	-
	C 6.63	7.63	8.63	10.13	12.75	14.13	16.13	22.50	25.13	-	-
	Weight 13	19	33	49	65	142	159	302	462	-	-
	E 4.75	6.50	11	11	12.50	14	14	19	23	27.50	27.50

All dimensions + or - 1/8 inch.

Pneumatic Valve Actuation

Compact Actuators that Provide Reliable Remote Control

- Saunders EC and SSC Pneumatic Actuators facilitate remote operation of the valve, as an integral part of a control system. Both are compact piston style actuators with excellent chemical and temperature resistance.
- The versatile and robust design derived from the use of high technology materials of construction, results in an actuator suitable for a wide range of process industry applications.
- All three operation modes, double acting, spring to close and spring to open feature the same physical dimensions for a given valve size.
- This provides uniform compact envelope dimensions and outstanding economic benefits particularly for spring return failsafe actuation.
- Field conversion of manual valves to power actuation is readily achieved "in-line" without special tools or modification.

EC

The EC is manufactured by injection molding PES (polyethersulphone), which has a temperature range of 14° to 212°F -10° to +100°C ambient (autoclave maximum 302°F 150°C). Actuators can be supplied as spring close, spring open or double acting with various spring pack options for a variety of pressure requirements.

Size range 1/4" to 2"
DN8 – DN50



EC Actuator
mounted on A Type
PFA lined valve



SSC

With the same flexibility as the EC Actuator, the SSC has been manufactured with a 316C12 stainless steel investment cast housing. Suitable for both aseptic and industrial applications the SSC has excellent resistance to both chemical and steam duties.

Size range 1/4" to 2"
DN8 – DN50



ECX

- Saunders ECX type actuators are designed to offer an extension to the EC size range while still maintaining the compact envelope size.
- The housing is manufactured in coated silicon aluminum for increased chemical resistance and long life.
- With the extensive flexibility in spring packs we can offer an actuator to suit a wide range of pressure and flow variations.

- Available in spring close, spring open and double acting modes of operation to suit process needs.
- A wide range of options including switches, positioners, limit stop and visual open/close indication are also available.

Size range 2½" to 6"
DN65 – DN150



ECX Actuator with visual indicator




ECX Actuator with switchbox and integral solenoid




EC Pneumatic Actuators 1/4" to 2" DN8 - DN50


Materials of Construction

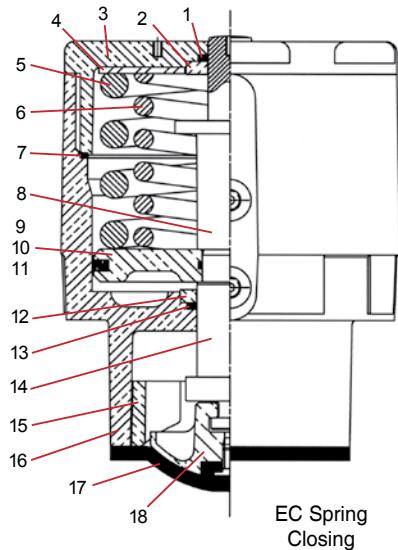

EC Spring Closing

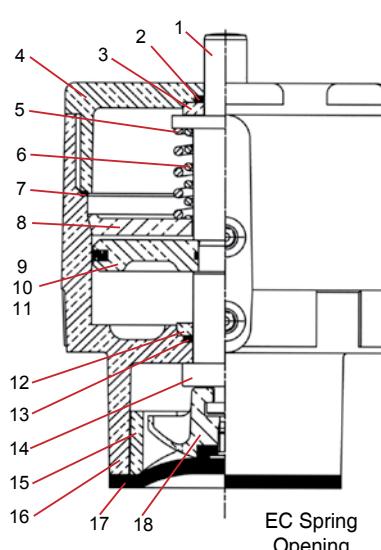

EC Spring Opening

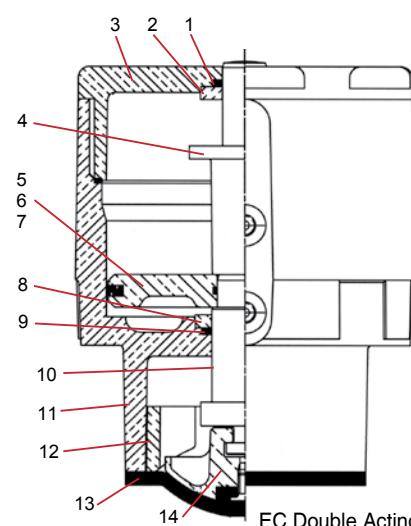

EC Double Acting

Materials Of Construction

Item	Component	Material
1	Indicator seal	Fluoroelastomer
2	Cap washer	PES 1/4"-1" DN8-25 IXEF 1 1/2"-2" DN40-50
3	Cap	PES 1/4"-1" DN8-25 IXEF 1 1/2"-2" DN40-50
4	Loading plate	Mild steel
5	Outer spring	Steel
6	Inner spring	Steel
7	Bonnet cap "O" ring	Nitrile
8	Indicator	IXEF
9	Outer piston seal	Fluoroelastomer
10	Piston	PES 1/4"-1" DN8-25 IXEF 1 1/2"-2" DN40-50
11	Inner piston seal	Nitrile
12	Bonnet washer	PES
13	Spindle seal	Fluoroelastomer
14	Spindle	IXEF
15	Bonnet insert	PES 1 1/2"-2" DN40-50
16	Bonnet	PES
17	Line diaphragm	Rubber, Rubber/PTFE
18	Compressor	Mazak 1/4" DN8 Mild Steel 1/2"-1" DN15-25 Silicon Aluminum Stainless Steel 1/2"-2" DN15-50




Materials Of Construction

Item	Component	Material
1	Indicator	IXEF
2	Indicator seal	Fluoroelastomer
3	Cap washer	PES 1/4"-1" DN8-25 IXEF 1 1/2"-2" DN40-50
4	Cap	PES 1/4"-1" DN8-25 IXEF 1 1/2"-2" DN40-50
5	Outer spring	Steel
6	Inner spring	Steel
7	Bonnet cap "O" ring	Nitrile
8	Spring support plate	PES
9	Outer piston seal	Fluoroelastomer
10	Piston	PES 1/4"-1" DN8-25 IXEF 1 1/2"-2" DN40-50
11	Inner piston seal	Fluoroelastomer
12	Bonnet washer	PES
13	Spindle seal	Nitrile
14	Spindle	IXEF
15	Bonnet insert	PES 1 1/2"-2" DN40-50
16	Bonnet	PES
17	Line diaphragm	Rubber, Rubber/PTFE
18	Compressor	Mazak 1/4" DN8 Mild Steel 1/2"-1" DN15-25 Silicon Aluminum Stainless Steel 1/2"-2" DN15-50

Materials Of Construction

Item	Component	Material
1	Indicator seal	Fluoroelastomer
2	Cap washer	PES 1/4"-1" DN8-25 IXEF 1 1/2"-2" DN40-50
3	Cap	PES 1/4"-1" DN8-25 IXEF 1 1/2"-2" DN40-50
4	Indicator	IXEF
5	Outer piston seal	Fluoroelastomer
6	Piston	PES 1/4"-1" DN8-25 IXEF 1 1/2"-2" DN40-50
7	Inner piston seal	Fluoroelastomer
8	Bonnet washer	PES
9	Spindle seal	Nitrile
10	Spindle	IXEF
11	Bonnet	PES
12	Bonnet insert	PES 1 1/2"-2" DN40-50
13	Line diaphragm	Rubber, Rubber/PTFE
14	Compressor	Mazak 1/4" DN8 Mild Steel 1/2"-1" DN15-25 Silicon Aluminum Stainless Steel 1/2"-2" DN15-50

**ssc (Stainless Steel) Compact
Pneumatic Actuators 1/4" to 2" DN8 - DN50**
Materials of Construction

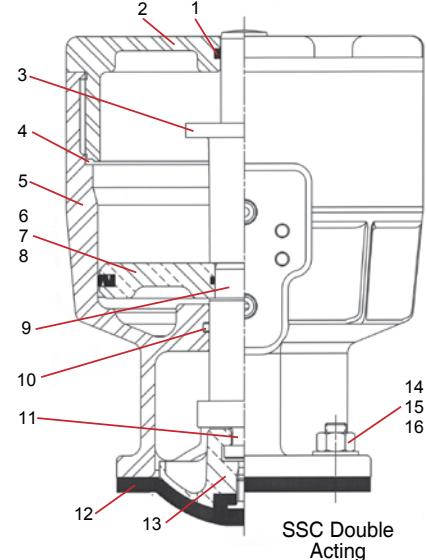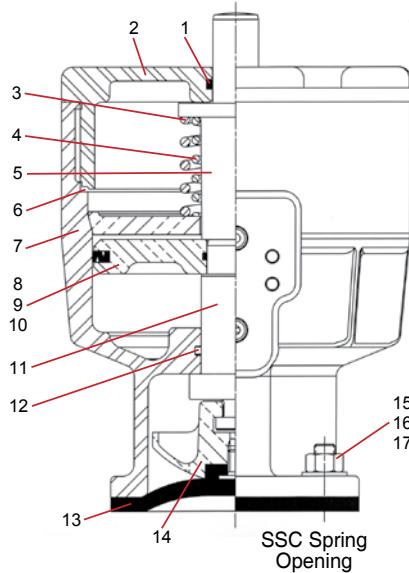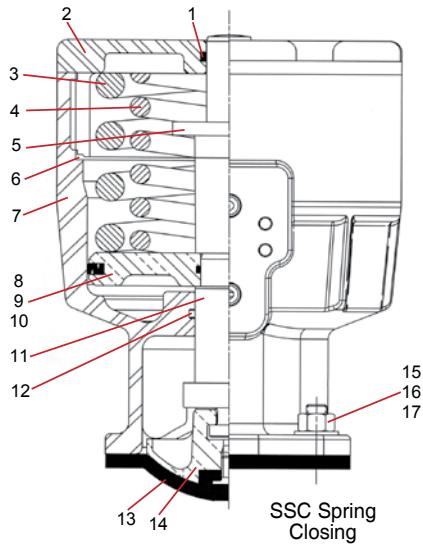

Materials Of Construction

Item	Component	Material
1	Indicator seal	Viton
2	Cap	Stainless Steel
3	Outer spring	Steel
4	Inner spring	Steel
5	Indicator	Ixef
6	Bonnet cap "O" Ring	Nitrile
7	Bonnet	Stainless Steel
8	Outer piston seal	Fluoroelastomer
9	Piston inner "O" ring	Nitrile
10	Piston	PES 1/4"-1" DN8-25 Ixef 1 1/2"-2" DN40-50
11	Spindle	Ixef
12	Spindle "O" ring	Fluoroelastomer
13	Line diaphragm	Rubber, Rubber/PTFE
14	Compressor	Stainless Steel
15	Body/bonnet nut	Stainless Steel
16	Body/bonnet washer	Stainless Steel
17	Body/bonnet bolt/stud	Stainless Steel

Materials Of Construction




Item	Component	Material
1	Indicator seal	Viton
2	Cap	Stainless Steel
3	Outer spring	Steel
4	Inner spring	Steel
5	Indicator	Ixef
6	Bonnet cap "O" Ring	Nitrile
7	Bonnet	Stainless Steel
8	Outer piston seal	Fluoroelastomer
9	Piston inner "O" ring	Nitrile
10	Piston	PES 1/4"-1" DN8-25 Ixef 1 1/2"-2" DN40-50
11	Spindle	Ixef
12	Spindle "O" ring	Fluoroelastomer
13	Line diaphragm	Rubber, Rubber/PTFE
14	Compressor	Stainless Steel
15	Body/bonnet nut	Stainless Steel
16	Body/bonnet washer	Stainless Steel
17	Body/bonnet bolt/stud	Stainless Steel

Materials Of Construction

Item	Component	Material
1	Indicator seal	Viton
2	Cap	Stainless Steel
3	Indicator	Ixef
4	Bonnet cap "O" Ring	Nitrile
5	Bonnet	Stainless Steel
6	Outer piston seal	Fluoroelastomer
7	Piston inner "O" ring	Nitrile
8	Piston	PES 1/4"-1" DN8-25 Ixef 1 1/2"-2" DN40-50
9	Spindle	Ixef
10	Spindle "O" ring	Fluoroelastomer
11	Thrust pad	Nylatron 1/4"-3/4" DN8-20
12	Line diaphragm	Rubber, Rubber/PTFE
13	Compressor	Stainless Steel
14	Body/bonnet nut	Stainless Steel
15	Body/bonnet washer	Stainless Steel
16	Body/bonnet bolt/stud	Stainless Steel

ECX Pneumatic Actuators 2 1/2" to 6" DN65 - DN150

Materials of Construction

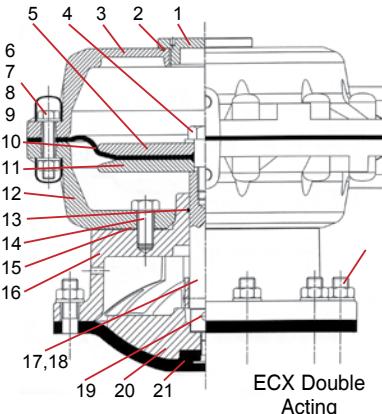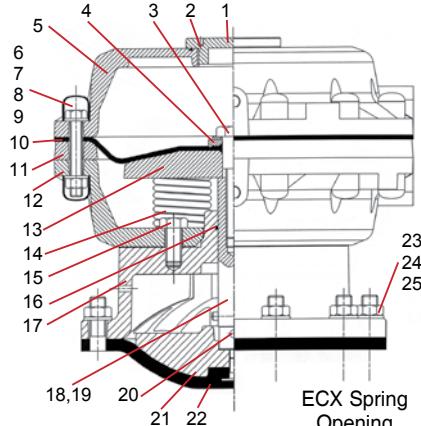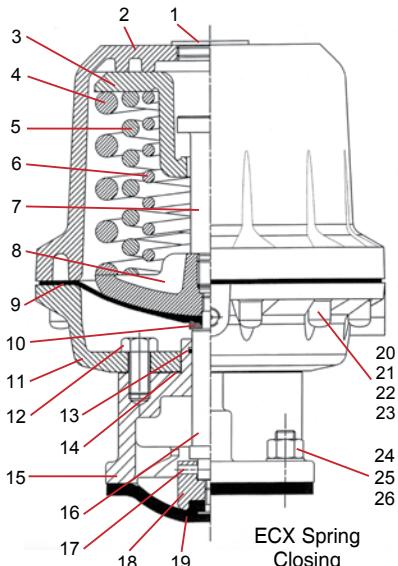

Materials Of Construction - ECX/SC

Item	Component	Material
1	Plug	Polyethylene
2	Cover	Silicon aluminum
3	Upper spring plate	Ductile iron
4	Outer spring	Steel
5	Middle spring	Steel
6	Inner spring	Steel
7	Spring retaining bolt	Mild steel
8	Diaphragm plate	Forged steel
9	Operating diaphragm	Rubber
10	Clamp washer	Mild steel
11	Lower cylinder	Silicon aluminum
12	Cylinder/bonnet bolt	Steel
13	Bonnet "O" ring	Nitrile
14	Bonnet/cylinder joint	Klingsersil
15	Bonnet	Cast iron
16	Spindle	Stainless Steel
17	Compressor pin	Steel
18	Compressor	Cast iron
19	Line diaphragm	Rubber, Rubber/PTFE
20	Screw cover	PE
21	Cylinder cover screw	Steel
22	Cylinder cover nut	Steel
23	Cylinder cover washer	Steel
24	Body/bonnet nut	Stainless Steel
25	Body/bonnet stud	Stainless Steel
26	Body/bonnet washer	Stainless Steel

Materials Of Construction - ECX/SO


Item	Component	Material
1	Cover plug	Mild Steel
2	Cover plug "O" ring	Rubber
3	Spindle screw	Steel
4	Clamp washer	Mild Steel
5	Upper cylinder	Silicon aluminum
6	Screw cover	PE
7	Cylinder screw	Steel
8	Cylinder nut	Steel
9	Cylinder washer	Steel
10	Operating diaphragm	Rubber
11	Spacer ring	Silicon aluminum
12	Lower cylinder	Silicon aluminum
13	Diaphragm plate	SG Iron
14	Spring	Steel
15	Cylinder/bonnet bolt	Steel
16	Bonnet "O" ring	Nitrile
17	Bonnet	Cast iron
18	Spindle	Stainless Steel
19	Spindle limit pin	Steel
20	Compressor pin	Steel
21	Compressor	Cast iron
22	Line diaphragm	Rubber, Rubber/PTFE
23	Body/bonnet nut	Stainless Steel
24	Body/bonnet stud	Stainless Steel
25	Body/bonnet washer	Stainless Steel

Materials Of Construction - ECX/DA

Item	Component	Material
1	Cover plug	Mild Steel
2	Cover plug "O" ring	Rubber
3	Upper cylinder	Silicon aluminum
4	Spindle screw	Steel
5	Upper diaphragm plate	Mild Steel
6	Screw cover	PE
7	Cylinder screw	Steel
8	Cylinder nut	Steel
9	Cylinder washer	Steel
10	Operating diaphragm	Rubber
11	Lower diaphragm plate	Mild Steel
12	Lower cylinder	Silicon aluminum
13	Bonnet "O" ring	Rubber
14	Cylinder/bonnet bolt	Steel
15	Cylinder/bonnet joint	Klingsersil
16	Bonnet	Cast iron
17	Spindle	Stainless Steel
18	Spindle limit pin	Steel 6" 150mm
19	Compressor pin	Steel
20	Compressor	Cast iron
21	Line diaphragm	Rubber, Rubber/PTFE
22	Body/bonnet nut	Stainless Steel
23	Body/bonnet stud	Stainless Steel
24	Body/bonnet washer	Stainless Steel





Materials Of Construction - INDICATOR

Item	Component	Material
1	Indicator cover	Polycarbonate
2	Indicator	Polycarbonate
3	Indicator "O" ring	Rubber

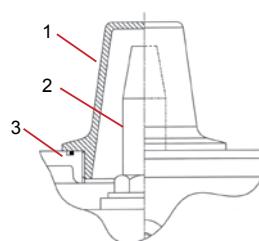

Note: Visual indicator is an optional extra on the ECX.

EC/SSC/ECX Actuator Dimensions

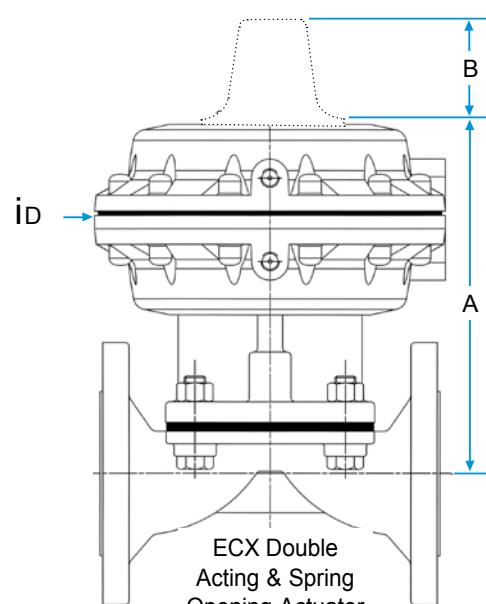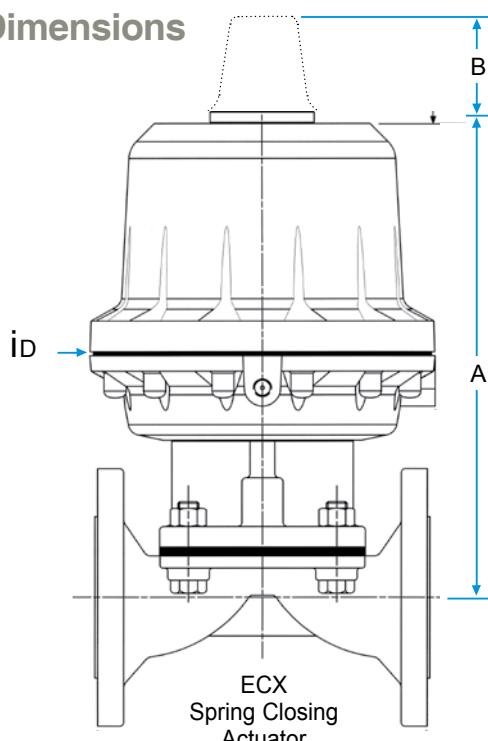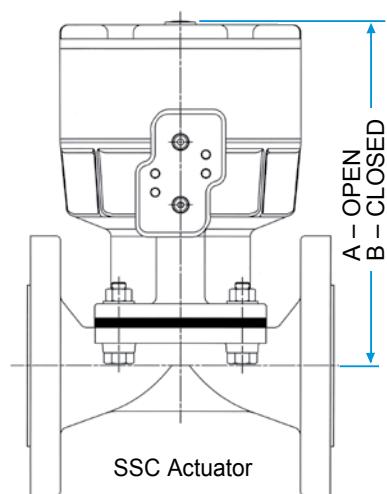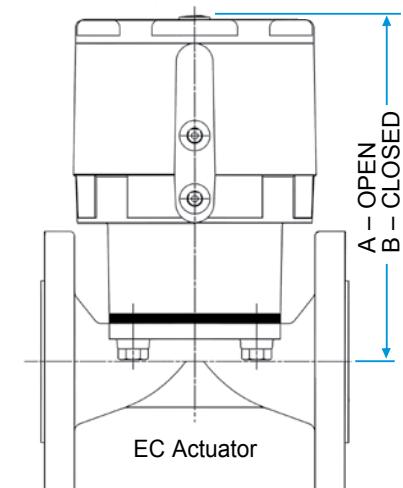

Notes:
Dimension 'B' is for optional indicator on ECX models.
Varying line and operating pressures are accommodated by head models L and S. For performance refer to our technical data sheets.

EC/SSC

Size	A	B
1/2"	5	5
15	115	110
3/4"	6.3	6
20	160	152
1"	6.3	6
25	168	161
1 1/2"	8.8	8
40	231	217
2"	9	9
50	249	229

ECX/SO Spring Open

Size	S - Series		
	A	B	D
2 1/2"	9.6	2.2	10
65	245	55	266
3"	11	2.2	10
80	267	55	266
4"	12	2.2	10
100	305	55	266

Size	H - Series		
	A	B	D
4"	14	2.6	14.1
100	359	67	360
5"	14.7	2.6	14.1
125	373	67	360
6"	14.9	2.6	14.1
150	379	67	360

ECX/SC Spring Closed

Size Inches DN	Heads F1, F2, & F3		
	A	B	D
2 1/2"	14	2.2	10
65	359	55	266
3"	15	2.2	10
80	370	55	266
4"	16	2.2	10
100	417	55	266

Size Inches DN	Heads G1, G2, & G3		
	A	B	D
2 1/2"	15.7	2.2	10.4
65	399	55	266
3"	16.1	2.2	10.4
80	410	55	266
4"	18	2.2	10.4
100	458	55	266


Size Inches DN	Heads H1, H2, & H3		
	A	B	D
4"	22	2.6	14.1
100	560	67	360
5"	22.6	2.6	14.1
125	576	67	360
6"	23.3	26	14.1
150	593	67	360

Note:




All EC & SSC actuator air inlet parts are 1/8" BSP or 1/8" NPT
All ECX actuators are 1/4" BSP

Pneumatic Valve Actuation

ES Modular Actuators

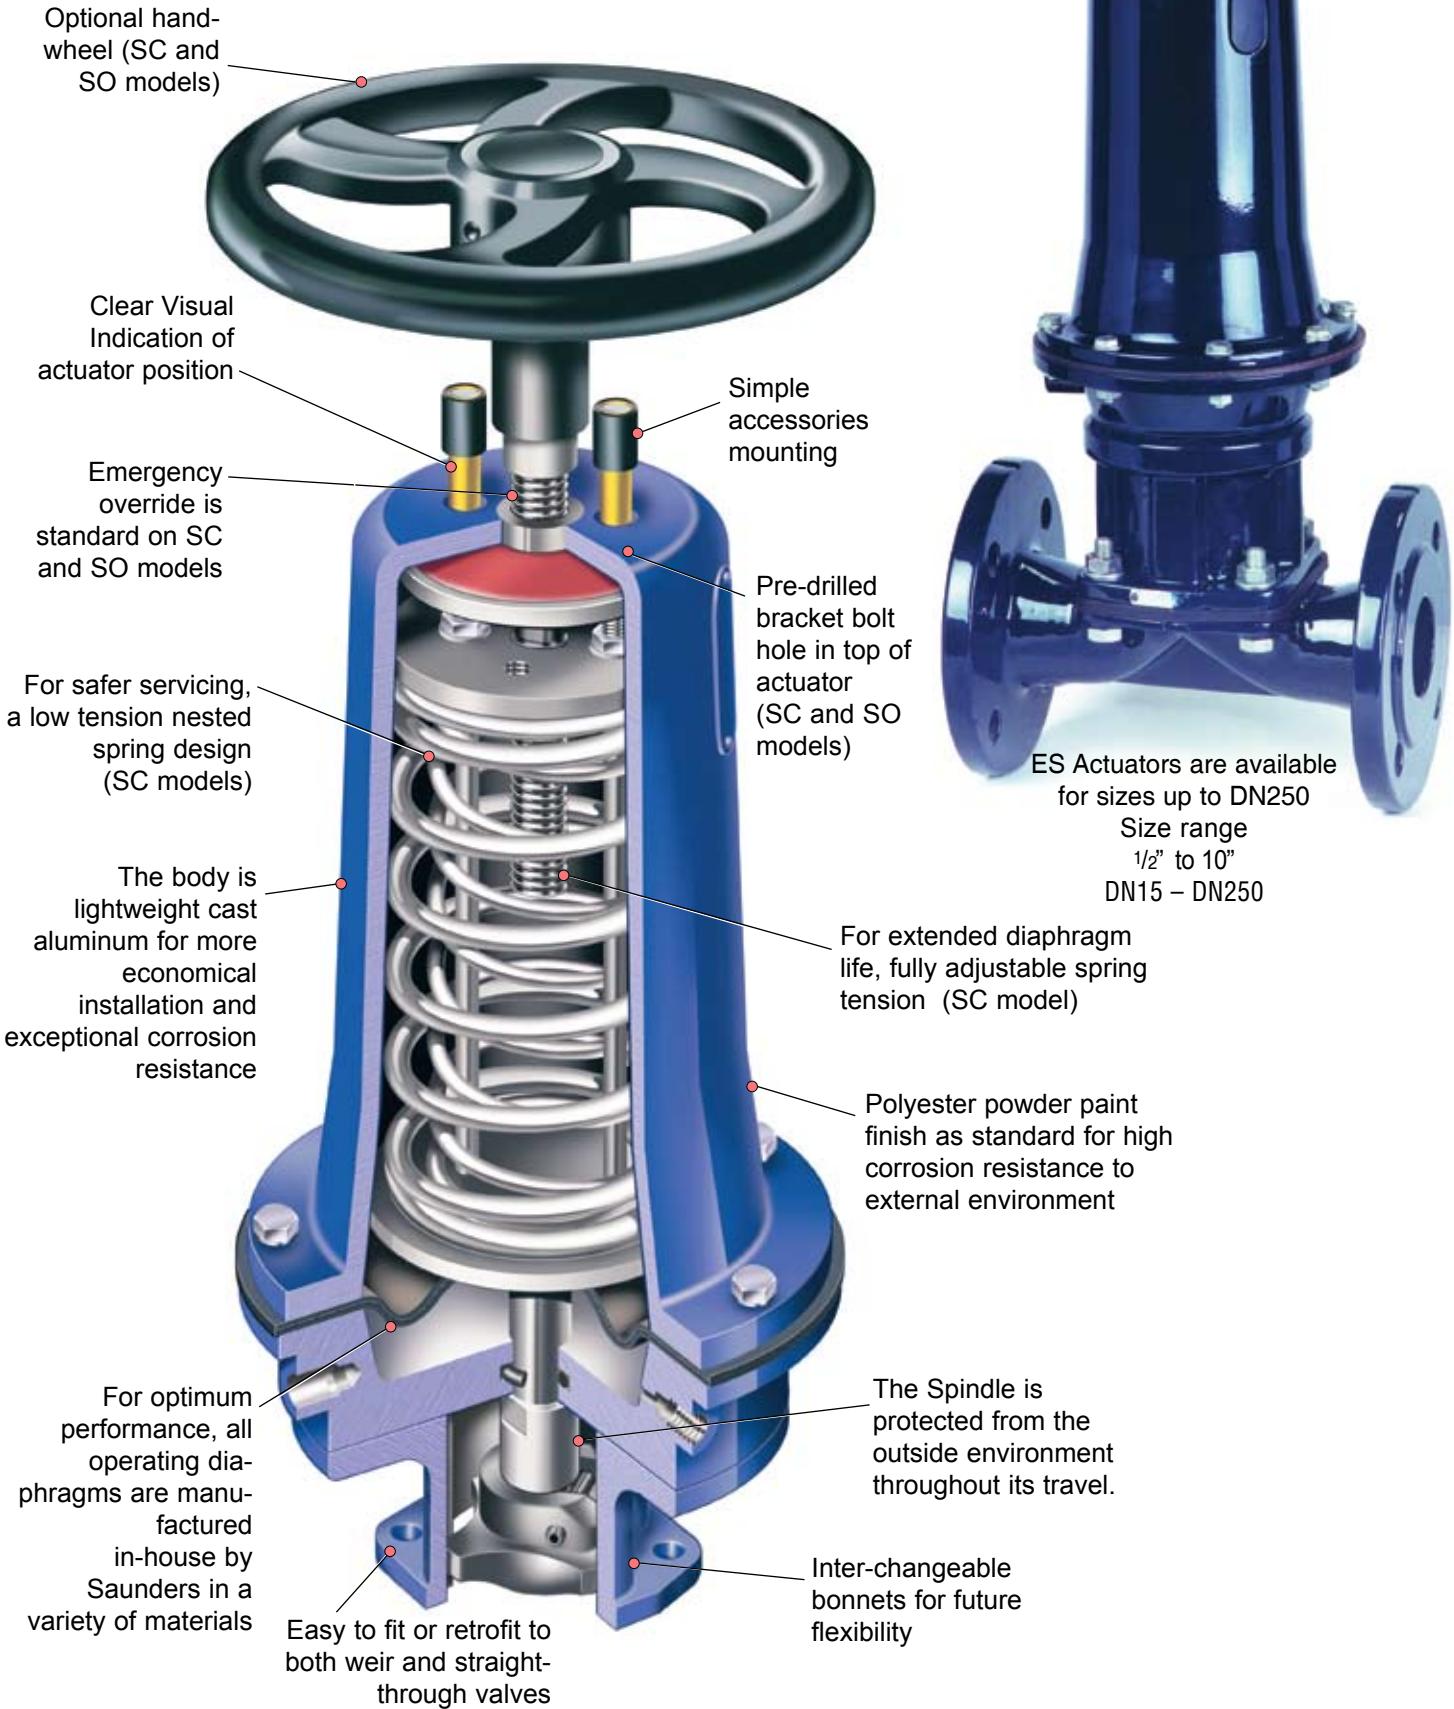

ES Pneumatic Actuation 1/2" to 8" DN15 - DN200 Materials of Construction

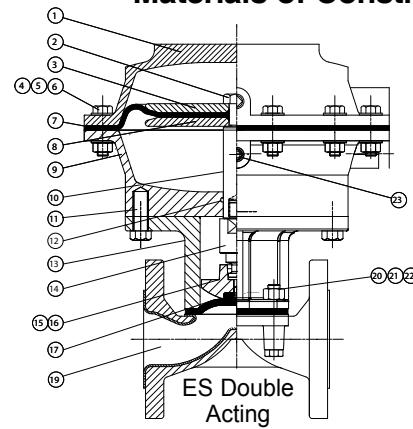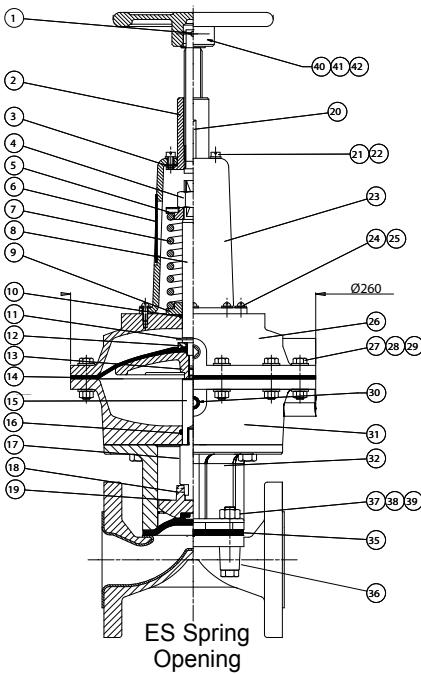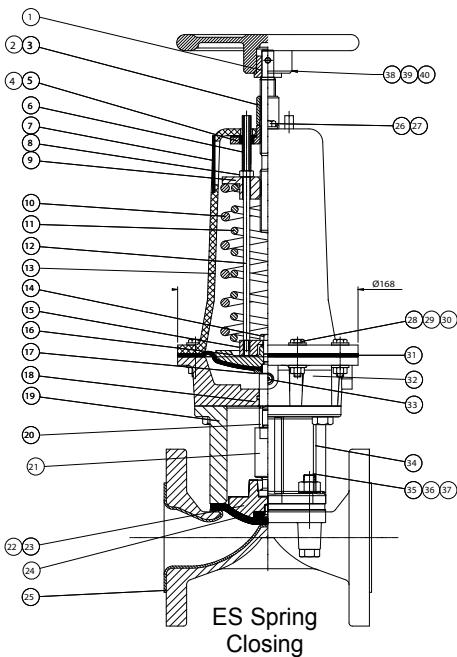

Materials Of Construction - ES (SC)

Item	Component	Material
1	Handwheel spindle	Mild steel
2	Locking bush	Mild steel
3	Locking bush screw	Steel
4	Reinforcing plate	Forged steel
5	Cover seal	PVC
6	Indicator sleeve	PVC
7	Slot seal	PVC
8	Lifting rod locknut	Steel
9	Upper spring plate	Forged steel
10	Outer spring	Steel
11	Inner spring	Steel
12	Lifting rod	Mild steel
13	Cover	Silicon aluminum
14	Locking plate screw	Steel
15	Lifting plate	Mild steel
16	Diaphragm plate	Forged steel
17	Clamp washer	Mild steel
18	Cylinder/bonnet screw	Steel
19	Bonnet 'O' ring	Rubber
20	Master spindle	Stainless steel
21	Spindle attachment	Stainless steel
22	Compressor	Cast iron
23	Compressor pin	Steel
24	Line diaphragm	Rubber
25	Body	Cast iron
26	Reinforcing plt. screw	Steel
27	Reinforcing plt. washer	Steel
28	Cylinder/cover nut	Steel
29	Cylinder/cover bolt	Steel
30	Cylinder/cover washer	Steel
31	Operating diaphragm	Rubber
32	Lower cylinder	Silicon aluminum
33	Cylinder plug	Malleable iron
34	Bonnet	Cast iron
35	Body/bonnet nut	Steel/stainless steel
36	Body/bonnet stud	Steel/stainless steel
37	Body/bonnet washer	Steel/stainless steel
38	Handwheel	Cast iron
39	Handwheel adaptor	Mild steel
40	Handwheel Pin	Steel

Materials Of Construction - ES (SO)

Item	Component	Material
1	Handwheel spindle	Mild steel
2	H/wheel spindle brush	Mild steel
3	Cover seal	PVC
4	Adjusting screw locknut	Mild steel
5	Upper spring plate	Steel
6	Slot seal	PVC
7	Spring	Steel
8	Adjusting screw	Mild steel
9	Lower spring plate	Mild Steel
10	'O' ring	Nitrile
11	Dished washer	Mild Steel
12	Clamp washer	Mild steel
13	Diaphragm plate	Forged steel
14	Operating diaphragm	Rubber
15	Master spindle	Stainless steel
16	Cylinder 'O' ring	Rubber
17	Spindle attachment	Stainless steel
18	Compressor pin	Steel
19	Compressor	Cast iron
20	Indicator rod	Mild steel
21	H/wheel bush screw	Steel
22	H/wheel bush washer	Steel
23	Cover	Silicon Aluminum
24	Cylinder cover screw	Steel
25	Cylinder cover washer	Stainless steel
26	Upper Cylinder	Silicon Aluminum
27	Cylinder screw	Steel
28	Cylinder nut	Steel
29	Cylinder washer	Steel
30	Cylinder Plug	Malleable iron
31	Cylinder	Silicon Aluminum
32	Bonnet	Cast iron
33	Threaded insert	Steel
34	Cylinder/bonnet screw	Steel
35	Line diaphragm	Rubber
36	Body	Cast iron
37	Body/bonnet nut	Steel
38	Body/bonnet stud	Steel
39	Body/bonnet washer	Steel
40	Handwheel	Steel
41	Handwheel pin	Steel
42	Handwheel adaptor	Mild Steel

Materials Of Construction - ES (DA)


Item	Component	Material
1	Upper cylinder	Silicon aluminum
2	Diaphragm plate screw	Steel
3	Upper diaphragm plate	Mild steel
4	Cylinder nut	Steel
5	Cylinder bolt	Steel
6	Cylinder washer	Steel
7	Operating diaphragm	Rubber
8	Lower diaphragm plate	Mild Steel
9	Lower cylinder	Silicon aluminum
10	Spindle	Stainless steel
11	Cylinder/bonnet bolt	Steel
12	Cylinder 'O' ring	Rubber
13	Bonnet	Cast iron
14	Spindle adaptor	Stainless steel
15	Compressor pin	Steel
16	Compressor	Cast iron
17	Line diaphragm	Rubber
18	Body	Cast iron
19	Body/bonnet nut	Steel/stainless steel
20	Body/bonnet bolt	Steel/stainless steel
21	Body/bonnet stud	Steel/stainless steel
22	Cylinder Plug	Malleable iron

Note: For actuators > DN 150, please contact Saunders for Parts



Pneumatic Valve Actuation

Valve Throttling and Flow Control

Hysteresis for weir type diaphragm valve fitted with actuator plus valve positioner


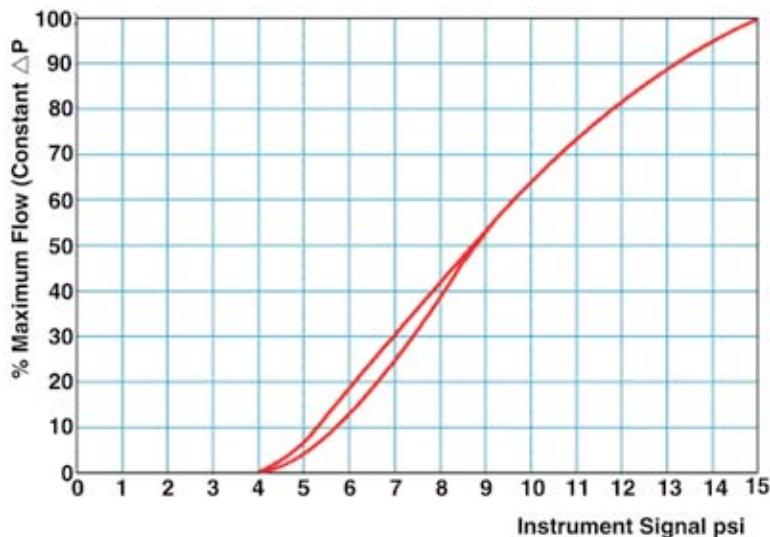


Valve characteristic curves

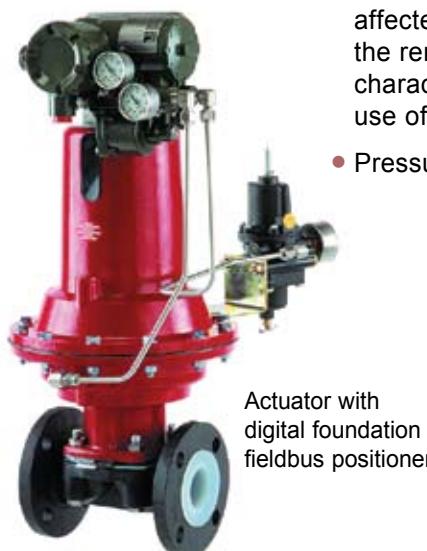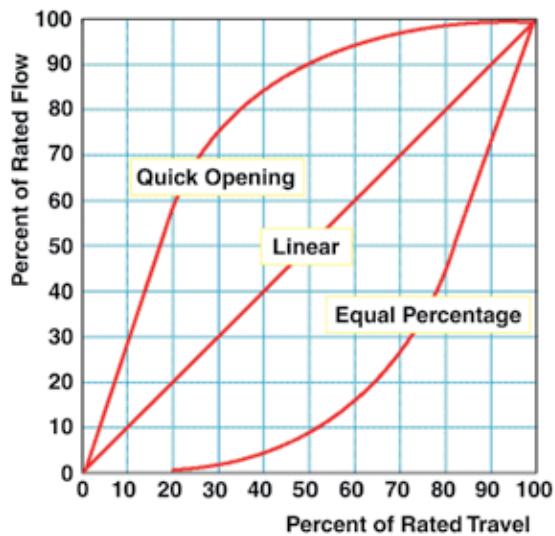

Actuator with digital foundation fieldbus positioner

- Saunders diaphragm valves offer excellent control capabilities within a broad range of pressure, flow or level control applications.
- Rangeability (ratio of maximum flow vs. minimum control flow) of Saunders weir type valves is 35:1 extending beyond the range of most process and service control systems.
- The positive shut-off characteristics of the valve can, in many instances, eliminate the need for independent block valves, a major component in the piping system cost.
- The inherent flow characteristics illustrated shows linearity up to 60% of travel (80% of flow).
- The chart illustrates installed characteristics affected by the dynamic friction loss for the remainder of the piping system. Other characteristics can be obtained through the use of characterized positioners.
- Pressure recovery factor = 0.7.

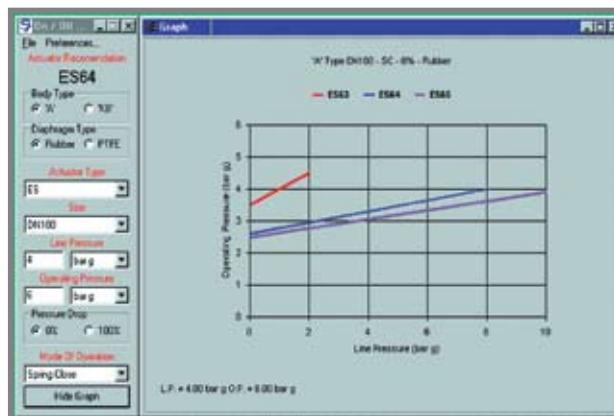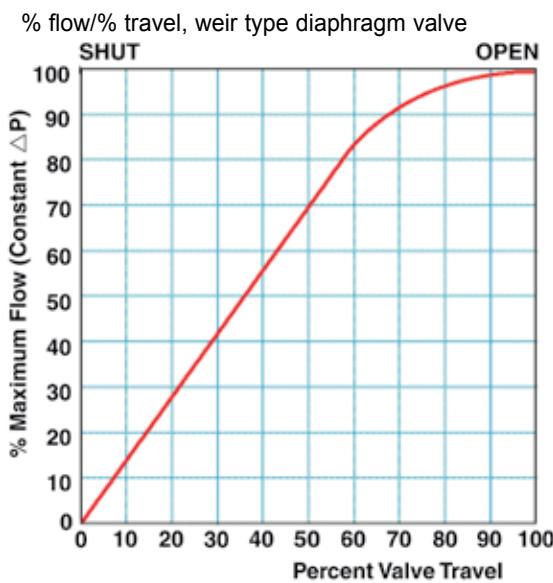

On/Off Actuation Selection


To use this software, you simply enter your process data into the selection boxes. The program sizes the actuator to suit your specific requirements.

Actuators - Accessories

Overview

MODEL	SIZE RANGE	STYLE	MATERIAL	SOLENOID	SWITCH BOX	POSITIONER	AIR FILTER	HAND-WHEEL
EC	1/4" to 2" DN8-DN50	A	PES	✓	✓	✓	✗	✗
SSC	1/4" to 2" DN8-DN50	A	316 C12	✓	✓	✓	✗	✓
ECX	2 1/2" to 6" DN65-DN150	A	SiAl	✓	✓	✗	✓	✗
ES	1/2" to 8" DN15-DN250	A,KB	SiAl	✓	✓	✓	✓	✓

✓ = Available and ✗ = Not available

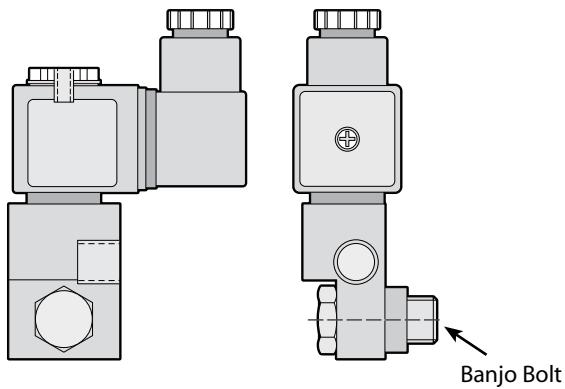



Solenoid Valves

A wide range of locally mounted banjo solenoid valves can be fitted to the Saunders actuator range with a manual override option and various hazardous area classifications. The solenoid range is designed to cover all requirements.

EC & SSC Limit-Open Stop

The EC/SSC limit-open stop can be supplied to order. It offers a fully adjustable travel stop.

With the removal of the plastic cover, the limit stop is easily accessible.

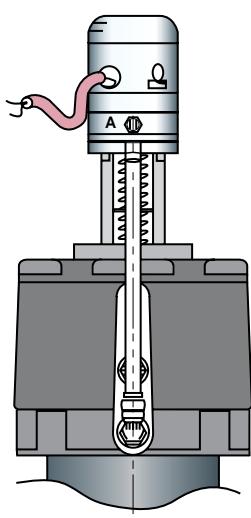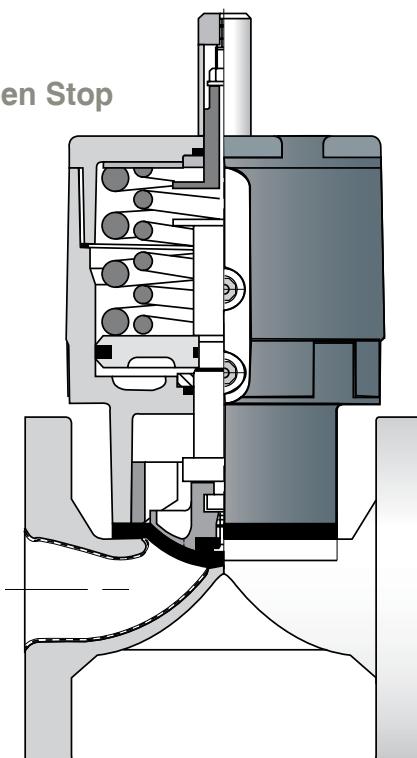



Mini Positioner

For control application on the EC and SSC, Saunders offers both pneumatic, electro-pneumatic and digital inputs with sensor feedback option and linear mounting design providing a compact control solution.

SSC Manual Over-Ride


SSC can be supplied with an emergency manual override manufactured from stainless steel. Please contact the factory for further information.

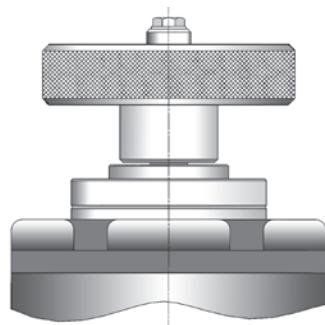

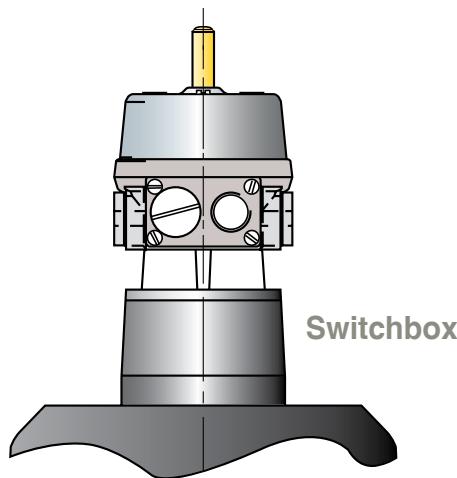


This modular switchbox option is available for EC/SSC & ECX actuator ranges. The switchbox offers a wide range of mechanical and proximity sensors with space for up to 4 switches, integral solenoid valve & ASi interface*.

*ASi Interface can be retrofitted.

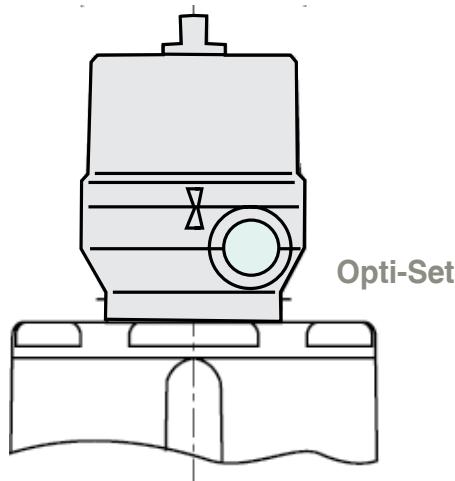


- Self setting. Minimize validation/set-up time.
- Remote, open/closed indication.
- Economical, compact, lightweight design.
- Allows for compression/set of the diaphragm.
- Easy access, even at difficult angles.
- Available with mechanical or proximity switches, including safety options.

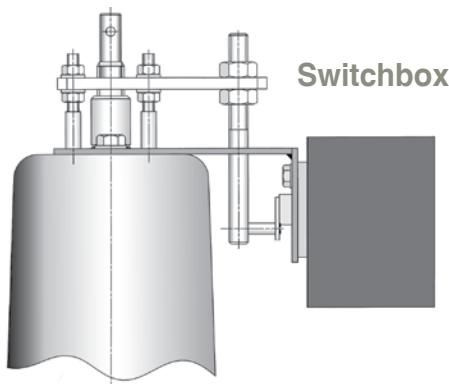

Shown mounted to ES Actuator

Highly modular switch-boxes are available for the ES Modular actuator range. Offering a wide range of both mechanical and proximity switches as well as other options, i.e. ASi-interface.

Other control options available upon request.

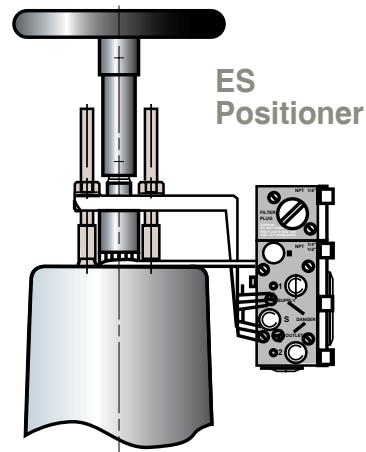

Shown mounted to ES Actuator

Provides precise control of the flow through the valve. This long life corrosion resistant range suits a wide variety of applications with reliability and accuracy. Available as pneumatic electro-pneumatic intrinsically safe and explosion proof, together with a variety of feedback options. A digital option is also available.



CRANE ChemPharma Flow Solutions™

XOMOX Headquarters

4444 Cooper Road,

Cincinnati, OH 45242, U.S.A.

Tel.: (513) 745-6000

Fax: (513) 745-6086

www.cranechempharma.com

CRANE

ChemPharma Flow Solutions

Crane Process Flow Technologies Ltd.
Grange Road
Cwmbran, Gwent NP44 3XX
UNITED KINGDOM
Tel: +44 163 348 6666
Fax: +44 163 348 6777



brands you trust.

CRANE ChemPharma Flow solutions Include: Pipe - Valves - Fitting - Actuators - Pumps

DEPA®

PSI
LINED PIPING SYSTEMS

ResistoPure™

Saunders®
the science inside

ELRO®

RESISTOFLEX®

revo

XOMOX®

CP-SAUNDERS-IDV-BU-EN-To-10/09-PN336555

Crane Co., and its subsidiaries cannot accept responsibility for possible errors in catalogues, brochures, other printed materials, and website information. Crane Co. reserves the right to alter its products without notice, including products already on order provided that such alteration can be made without changes being necessary in specifications already agreed. All their trademarks in this material are property of the Crane Co. or its subsidiaries. The Crane and Crane brands logotype (Xomox®, Saunders®, Resistoflex®, Resistopure™, PSI®, DEPA®, ELRO®, REVO®) are registered trademarks of Crane Co. All rights reserved.